

FABRICATION, ANALYSIS AND PERFORMANCE STUDY OF AN INCLINED SOLAR STILL-CUM-HOT WATER SYSTEM

by

ASHESH KUMAR SINHA

ME
1981
M
SIN
FAB

TH
ME/1981/14
SI 64 f



DEPARTMENT OF MECHANICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY KANPUR
SEPTEMBER, 1981

FABRICATION, ANALYSIS AND PERFORMANCE STUDY OF AN INCLINED SOLAR STILL-CUM-HOT WATER SYSTEM

A Thesis Submitted
in Partial Fulfilment of the Requirements
for the Degree of
MASTER OF TECHNOLOGY

by
ASHESH KUMAR SINHA

to the

**DEPARTMENT OF MECHANICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY KANPUR
SEPTEMBER, 1981**

ME-1901-M-SIN-FAB

I.I.T. KANPUR
CENTRAL LIBRARY
70577
-5 MAY 1982

25.9.01
W

CERTIFICATE

This is to certify that this work on "Fabrication, Analysis and Performance Study of an Inclined Solar Still-cum-Hot Water System" has been carried out under my supervision and it has not been submitted elsewhere for a degree.

H.C. Agrawal
Professor and Head
Department of Mechanical Engineering
Indian Institute of Technology, Kanpur

3-10-81 W



ACKNOWLEDGEMENT

I wish to express my deep sense of gratitude and sincere regards to Dr. H.C. Agrawal for his constant encouragement and invaluable guidance in the successful completion of this work.

I am also grateful to Dr. P.N. Kaul and Dr. D.P. Rao for their useful suggestions during the course of study.

My sincere thanks are due to Shri S.N. Sharma and Shri Babulal for their constant assistance throughout the period of experimentation. Co-operation rendered by Messers. J.P. Gupta and P.N. Mishra is also gratefully acknowledged.

Lastly, I thank Mr. J.P. Gupta for his excellent typing of the manuscript.

ASHESH KUMAR SINHA

CONTENTS

	<u>Page</u>
LIST OF TABLES	vi
LIST OF FIGURES	vii
NOMENCLATURE	ix
ABSTRACT	xiv
CHAPTER 1 : INTRODUCTION	1
CHAPTER 2 : THE EXPERIMENTAL SET-UP	10
2.1.1 Description of the Inclined Solar Still	10
2.1.2 The Basin-type Solar Still	14
2.1.3 Pipings, Fittings and Storage Tank	16
2.2 Instrumentation	17
2.2.1 Total Solar Radiation Measurement	17
2.2.2 Temperature Measurement	17
2.2.3 Flow Measurement	19
2.2.4 Wind Velocity Measurement	19
2.3 Modes of Test	20
CHAPTER 3 : HEAT AND MASS TRANSFER ANALYSIS OF THE INCLINED SOLAR STILL	21
3.1 Heat balance of the still	21
3.2 Heat Flux due to Natural Convection	22
3.3 Heat Flux due to Radiation	25
3.4 Heat Flux due to Evaporation and Condensation	26

	<u>Page</u>
3.5 Heat Flux due to Back Losses, from the basin to the surroundings	30
3.6 Heat Flux due to Upward Losses, from the glass cover to the surroundings	31
3.7 Effectiveness of the glass-cover assembly as a heat-exchanger	32
3.8 Still Efficiency	33
CHAPTER 4 : RESULTS AND DISCUSSIONS	34
4.1 Experimental Procedure	34
4.2 Analysis of the Experimental Data and Results	35
4.3 Conclusions	54
REFERENCES :	56
APPENDIX 1 : Evaluation of the Buoyancy Factors for Heat and Mass Transfer in Natural Convection.	58
APPENDIX 2 : Computer Programme	62

LIST OF TABLESPage

Table 4.1(a)	Experimental data obtained for the Inclined Still for the First Mode of Test (top glass cover retained), May 26, 1981.	36
Table 4.1(b)	Results of the test conducted on May 26, 1981.	37
Table 4.2(a)	Experimental data obtained for the Inclined Still for the Second Mode of Test (top glass cover removed), May 27, 1981.	39
Table 4.2(b)	Results of the test conducted on May 27, 1981.	40
Table 4.3	Comparison of daily total yield of distillate for the two types of stills for the month of May, 1981.	43

LIST OF FIGURES

	<u>Page</u>
Figure 1.1 Schematic Diagram of a Basin-type Solar Still	3
Figure 2.1 Schematic Diagram of the Experimental Set-up.	11
Figure 2.2 Details of the Inclined Solar Still	13
Figure 2.3 Details of the Basin-type Solar Still	15
Figure 2.4 Positions of Thermocouples for the Inclined Solar Still	18
Figure 4.1 Experimental data for the First Mode of Test	44
Figure 4.2 Experimental data for the Second Mode of Test	45
Figure 4.3 Variation of Hourly Yield of distillate over the day for the First Mode of Test	46
Figure 4.4 Variation of Hourly Yield of distillate over the day for the Second Mode of Test	47
Figure 4.5 Variation of Cumulative Yield of distillate over the day for the First Mode of Test	48

Page

Figure 4.6	Variation of Cumulative Yield of distillate over the day for the Second Mode of Test	49
Figure 4.7	Comparison of the Theoretical and Actual Efficiencies of Conversion for the First Mode of Test for the Inclined Still	50
Figure 4.8	Comparison of the Theoretical and Actual Efficiencies of Conversion for the Second Mode of Test for the Inclined Still	51
Figure 4.9	Variation of yield of distillate over Total Insolation for the Inclined Still	52
Figure 4.10	Comparison of daily total yield of distillate for the month of May, 1981	53

NOMENCLATURE

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
A_g	Area of glass cover	m^2
b	Thickness of glass-wool insulation	m
c	Molar concentration of mixture	$Kg\text{-moles}/m^3$
c_p	Specific heat at constant pressure	$J/Kgm\text{-}^\circ K$
D_{AB}	Binary diffusion coefficient of water-vapour in air	m^2/sec
E	Effectiveness of heat removal	
F	Shape factor	
g	Acceleration due to gravity	m/sec^2
Gr, Gr_m	Grashof numbers for heat and mass transfers, respectively	
h_c	Convective heat-transfer coefficient, basin-water surface to glass cover	$W/m^2\text{-}^\circ K$
h'_c	Convective heat-transfer coefficient, top glass cover to ambient	$W/m^2\text{-}^\circ K$
h_D	Mass-transfer coefficient	$Kgm/m^2\text{-}sec$
h_{fg}	Latent heat of condensation	$Kcal/Kgm$
I_s	Total insolation on the inclined still	$KJ/m^2\text{-}hr$
k	Thermal conductivity	$W/m\text{-}^\circ K$
L	Distance between the basin-water surface and bottom glass cover	m

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
m, m_A, m_B	Masses of the mixture, water-vapour and air, respectively	Kgm
\dot{m}	Mass flow rate of saline-water	Kgm/sec
M_A, M_B	Molecular weights of water-vapour and air, respectively	Kg/Kg-mole
N_A	Molar flux of water-vapour	Kg-moles/m ² -sec
N_b	Yield of distillate from the basin-type still	ml/hr
Nu	Nusselt number	
p	Total pressure of the mixture	Kgf/cm ²
p_A, p_B	Partial pressures of water vapour and air in mixture, respectively	Kgf/cm ²
Pr	Prandtl number	
q_a	Heat flux absorbed by basin-water	W/m ² -°K
q_b	Heat flux due to back losses	W/m ² -°K
q_c	Heat flux due to convection	W/m ² -°K
q_e	Heat flux due to evaporation and condensation	W/m ² -°K
q_ℓ	Heat flux due to upward losses	W/m ² -°K
q_r	Heat flux due to radiation	W/m ² -°K
Re	Reynold's number	
R_u	Universal Gas Constant,	$1.9859 \frac{\text{Kcal}}{\text{Kg-mole-}^\circ\text{K}}$

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
Sc	Schmidt number	
Sh	Sherwood number	
T, T_a, T_b, T_g	Temperature at a point, of the ambient, back surface and top glass cover, respectively	$^{\circ}\text{C}$
T_{sky}	Equivalent sky temperature	$^{\circ}\text{C}$
T_{w_i}, T_{w_o}	Inlet and outlet temperatures of the flowing saline water, respectively	$^{\circ}\text{C}$
ΔT	Temperature difference	$^{\circ}\text{C}$
v_{ave}	Average wind velocity	m/sec
v, v_A, v_B	Specific volumes of mixture, water-vapour and air, respectively	m^3/Kgm
V	Total volume of the mixture	m^3
W	Width of the inclined still	m
β_m	Coefficient of densification	$\text{m}^3/\text{Kg-mole}$
β_t	Coefficient of volume expansion	$1/^{\circ}\text{C}$
$\epsilon, \epsilon_{\lambda}$	Total and monochromatic emissivities, respectively	
ϵ'_g, ϵ_w	Total emissivities of glazing and saline-water, respectively	
η	Efficiency of conversion of saline-water into fresh water	

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
θ	Angle of inclination of the still with the horizontal	degrees
μ	Absolute viscosity	Kgm/m-sec
ρ	Mass density	Kgm/m ³
σ	Stefan-Boltzmann constant	$5.67 \times 10^{-8} \text{ W/m}^2\text{-}^\circ\text{K}^4$
τ	Time period	hr

Subscripts

1	refers to the basin-water surface
2	refers to the bottom glass cover
c	calculated
exp	experimental
i	i-th component
lm	logarithmic mean
th	theoretical
z	z-coordinate

ABSTRACT

An inclined solar still, combining the process of desalination and hot-water production has been developed. Theoretical analysis has been given. Tests have been carried out for a summer month and performance evaluated. The yield of the inclined still has been compared with that of a standard basin-type unit under similar condition.

The essential feature of the solar still developed in the present work consists of a thin film of water flowing continuously over the glass cover, which keeps it cool resulting in high yield of distillate. Heat gained by the water as a result of the heat transfer from the saline water in the basin to the glass cover raises its temperature as it flows over the cover. Thus, hot-water is obtained as a by-product in this process. The entire unit is kept at optimum tilt from the horizontal to receive maximum amount of incoming solar radiation on the basin surface.

A theoretical analysis of the inclined solar still has been carried out and the results compared with those obtained experimentally.

It is concluded that the inclined solar still with cooling-water system is an efficient device for the purpose of desalination. Such units may be installed over large areas near sea-coasts for large-scale production of fresh water.

CHAPTER - 1

INTRODUCTION

1.1 WATER SCARCITY, A GLOBAL PROBLEM

Lack of adequate quantities of fresh water has become a serious problem in several countries around the world. Large areas of the earth are arid, due to overwhelming sunshine and lack of rains. In most of these regions, ground water is available, but with a high percentage of mineral content, which makes it unfit for drinking and agricultural purposes. Small villages, situated near sea-coasts, too, face shortage of fresh water during peak periods of summer when fresh-water rivers and lakes nearby become dry, rendering serious drinking water problem to the population. 'Demineralization process' to produce desalinated water from saline or brackish water is not possible to carry out in most of the remote areas, due to non-availability of electricity, necessary for pumping processes and also due to high cost of installation of the demineralization plant.

Thus, in most of these arid zones or regions near a sea, where sunshine is abundant, conversion of saline or brackish water (also available in large quantities) to fresh water by means of solar energy seems to be the only possible solution today.



1.2 PRINCIPLE OF SOLAR DESALINATION

The principle of conversion of saline or brackish water to fresh water by means of solar energy can be best understood by referring to the simplest device, designated as the "basin-type solar still." This device is a reproduction, on a very small scale of the hydrologic cycle that occurs in nature, namely, heating of lakes and oceans by the sun's energy causing evaporation, the transport of water-vapour to cooler regions by convective winds and the subsequent condensation of the vapour causing rain and snow. As shown schematically in Fig.1.1, it consists of a blackened basin containing saline water at a shallow depth, over which is an air-tight glass cover that completely encloses the space above the basin. Solar energy, passing through the transparent cover, is absorbed by the water and the basin, warming the water causing evaporation to take place. A temperature difference exists between the hot saline-water surface and the relatively cool glass cover, resulting in convection currents to set up in the air, trapped inside the enclosure. These currents bring the humid air in contact with the glass cover, causing condensation of the vapour on the underside of the cover. The condensate slides down the slope, flows along the distillate channel and is collected in a container.

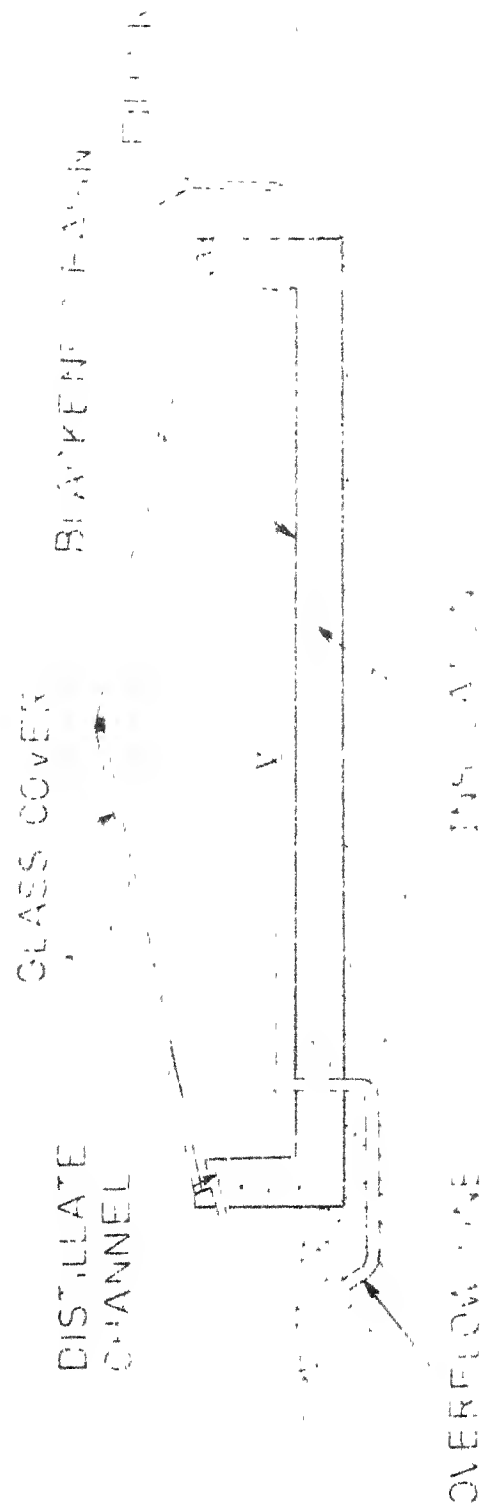


FIG. 11 SCHEMATIC DIAGRAM OF A BASIC STILL FOR DISTILLATION

1.3 ADVANTAGES OF SOLAR DESALINATION

Some of the important factors favouring solar desalination are as following :

- (1) In arid regions where there is no other source to obtain drinking water, solar desalination is the only solution.
 - (2) Solar energy is used as a substitute for fuel in solar desalination process to heat the saline water to form vapours which later condense to produce fresh water. In view of the present scarcity and high cost of fuels like coal, oil and gas all over the world, use of solar energy, which is free, inexhaustible and non-polluting in nature, is an attractive idea for desalination purpose.
 - (3) Solar desalination is most effective during the peak periods of sunshine, when the demand for fresh-water is also overy high. Also, during rainy season, when solar stills are not very effective, they can be used to collect rain water as fresh water. Thus, the demand and supply are effectively geared in this desalination process.
 - (4) Unlike the problem of installation of flat-plate collectors in populated areas where space problem is acute, solar stills in most cases, are installed
-

over vast areas in the arid region, which are otherwise lying barren. Production of fresh water in these arid zones may facilitate in utilizing large areas of land in future.

1.4 REVIEW OF PREVIOUS WORK

Historically, instances of application of solar energy to fresh water production have been recorded throughout the world and at various times during the past century. The unit which has been built and used extensively in the past and is still the most popular device for desalination purpose today, is the simple basin-type solar still, already discussed. The largest basin-type solar still was built in the year 1872 near Las Salinas in northern Chile. This unit had a basin area of 4700 m^2 and it produced 22700 litres of pure water per day to the needs of a nitrate mining community for many years.

During the World War II and the decade immediately following, sustained drought conditions in many parts of the world brought water supply into sharp focus. This resulted in the development of inflated plastic stills by Maria Telkes¹. The unit consisted of an inflatable plastic-envelope containing a felt-pad which was to be saturated with sea-water. Solar energy, striking the felt-pad, would produce vapour which would condense on the inside of the plastic-envelope and drip into the bottle at the bottom of

the assembly. Although, plastic stills are relatively cheap, their yield is low due to the formation of drop-wise condensation under the plastic roof, causing high reflection losses of incoming solar radiation. The efficiency of such stills, is less than 40 percent.

Tilted solar stills using porous pads as evaporating surfaces have also been used widely for many years. The upper end of the pad is immersed in a trough containing salt water, which spreads over the cotton by capillary action. Evaporation and condensation take place as usual. Although, the unit is cheap and easy to fabricate, yield is quite low due to low temperature of the evaporating surface. A maximum efficiency of 50 per cent has been reported for such stills.

A solar still with a low thermal inertia has been developed by Szulmayer². It is essentially a basin-type still with a floating, black absorber sheet to heat a thin layer of water (1.6 - 6.3 mm thick) on the top of the sheet, causing rapid evaporation. Since the base of the still is kept cooler, heat loss through conduction to the ground is reduced. The rate of evaporation (using a woven black shade cloth as the floating absorber) has been reported to be 0.308 litres/m²-hr.

Efforts have been made to increase the temperature of the basin-water by means of concentrating devices. A 'mini solar-still' designed by Muthuveerappan, et al.³,

incorporates mirror-type reflectors to concentrate solar energy on the tray. A 50-60 per cent increase in the yield of distilled water and a mean efficiency of 56 per cent have been reported. However, the extra cost of reflectors seems to outweigh the effect of increase in the yield.

Lobo, et al.⁴ have tested a multi-effect, basin-type solar still, which uses the upward heat fluxes due to convection, radiation and evaporation to heat a secondary basin consisting of an inclined-stepped glass tray. The upward heat-fluxes from the secondary basin are used to heat water contained in a third basin, similar in construction to the previous one. The condensate from each effect is collected in separate bottles. Although, an increase in yield of 40 - 50 per cent over the standard basin-type unit has been reported, the unit suffers from constructional difficulties, leakages of both saline-water and water-vapour through the linings and lack of long-term durability.

A second type of regenerative unit has been developed by Akhtamov, et al.⁵. This unit incorporates the reuse of upward heat fluxes to heat a layer of saline-water which is enclosed between two glass-covers and flows upwards due to hydrostatic pressure exerted by the saline-water contained in an overhead tank. The saline-water absorbs heat and is allowed to be fed into the basin to compensate for the evaporation of saline water. This process results in the preheating of the saline feed-water to the basin. An



efficiency of 60 per cent has been reported by the authors. However, since the rate of discharge of hot saline water to the basin is very small, the problem of cooling the cover assembly to obtain higher yield yet remains to be solved.

In view of the large area required to produce a given quantity of water by means of the basin-type stills, investigators have tried vertical type, multi-effect solar stills. One such unit developed by Dunkle⁶ consists of vertical parallel plates within an enclosure in which hot saline water is made to flow down the surface of a plate causing evaporation. Condensation takes place along the surface of an adjacent vertical plate, which is kept cool by allowing cold saline water to run down along the other surface of it. A series of such evaporators and condensers are installed to obtain higher yield. However, this increase in distiller performance is yet to be justified in terms of the large capital cost on the total plant economy.

1.5 THE PRESENT WORK

In most of the work on solar desalination, as reviewed above, the conversion efficiency has not been more than 60 per cent. The present effort is directed towards developing a more efficient still which acts as an auxiliary hot-water device as well. The main feature of the solar still developed in the present work consists of a box-type unit in which a thin film of water flows



continuously over the glass cover and keeps it cool, resulting in high yield of distillate. The saline water is stored in an overhead tank and fed continuously to the still through a perforated tube. Upward heat fluxes due to convection, radiation and evaporation get transferred to the thin film of water, whose temperature increases as it flows along the glass. Thus, in addition to high output of desalinated water due to increased evaporation rate, hot water, also, is obtained continuously throughout the day, which may be either stored or used to heat some auxiliary devices. The entire unit is kept at optimum tilt from the horizontal to receive the maximum amount of incoming solar radiation on the basin surface.

Chapter-2 describes the design and fabrication details of both the inclined and the basin-type stills for a comparative study. It also describes the instrumentation involved in the experiments and the modes of tests conducted.

In Chapter-3, heat and mass transfer analysis of the inclined still has been carried out.

The results obtained both from theoretical analysis and experiments carried out are discussed in Chapter-4. The hourly and cumulative yields of the inclined still are compared with that of the standard single roof, basin-type unit for a summer month.

CHAPTER - 2

THE EXPERIMENTAL SET-UP

The experimental set-up that was used for testing the performance of the inclined solar still and for comparing it with the basin-type unit is shown in Fig. 2.1.

2.1.1 DESCRIPTION OF THE INCLINED SOLAR STILL

The constructional details of various important parts of the inclined solar still are shown in Fig. 2.2 and discussed below.

The saline-water basin consists of 60 cms long aluminium angles (1cm x 1cm, 0.5 mm thick) placed in adjacent rows and fixed to the bottom of a rectangular box (60cms x 60cms x 10.6 cms) made of 22 gauge (0.85344 mm mean thickness) G.I. sheet. The channelled basin, thus, can contain about 3.6 litres of saline water when filled to a depth of 1 cm. To prevent leakage of water from one channel to the other through the sides, a rubber gasket, 1 mm thick, surrounds the periphery of the basin. The basin is painted with black paint mixed with black mesh powder, and later made dull by rubbing with emery paper to make it a good solar energy absorber.

- ① BASIN-TYPE SOLAR STILL
- ② INCLINED SOLAR STILL
- ③ INLET FOR SALINE WATER TO BASIN
- ④ INLET FOR SALINE WATER TO COOL THE BOTTOM GLASS COVER
- ⑤ HOT SALINE WATER OUTLET
- ⑥ CONDENSATE DRAIN
- ⑦ BASIN OVERFLOW AND DRAIN
- ⑧ PLASTIC BOTTLE (500ML) TO COLLECT THE CONDENSATE
- ⑨ TROUGH FOR COLLECTING SALINE WATER
- ⑩ SALINE WATER OUTLET FROM TROUGH TO DRAIN

- ⑪ 5.5MM WINDOW GLASS
- ⑫ SALINE WATER BASIN
- ⑬ GLASS WOOL INSULATION
- ⑭ SALINE WATER STORAGE TANK
- ⑮ OVERFLOW FOR TANK
- ⑯ GRADUATED WATER LEVEL INDICATOR
- ⑰ STEEL FRAME-WORK
- ⑱ HINGED JOINT TO ADJUST THE ANGLE OF TILT OF THE STILL

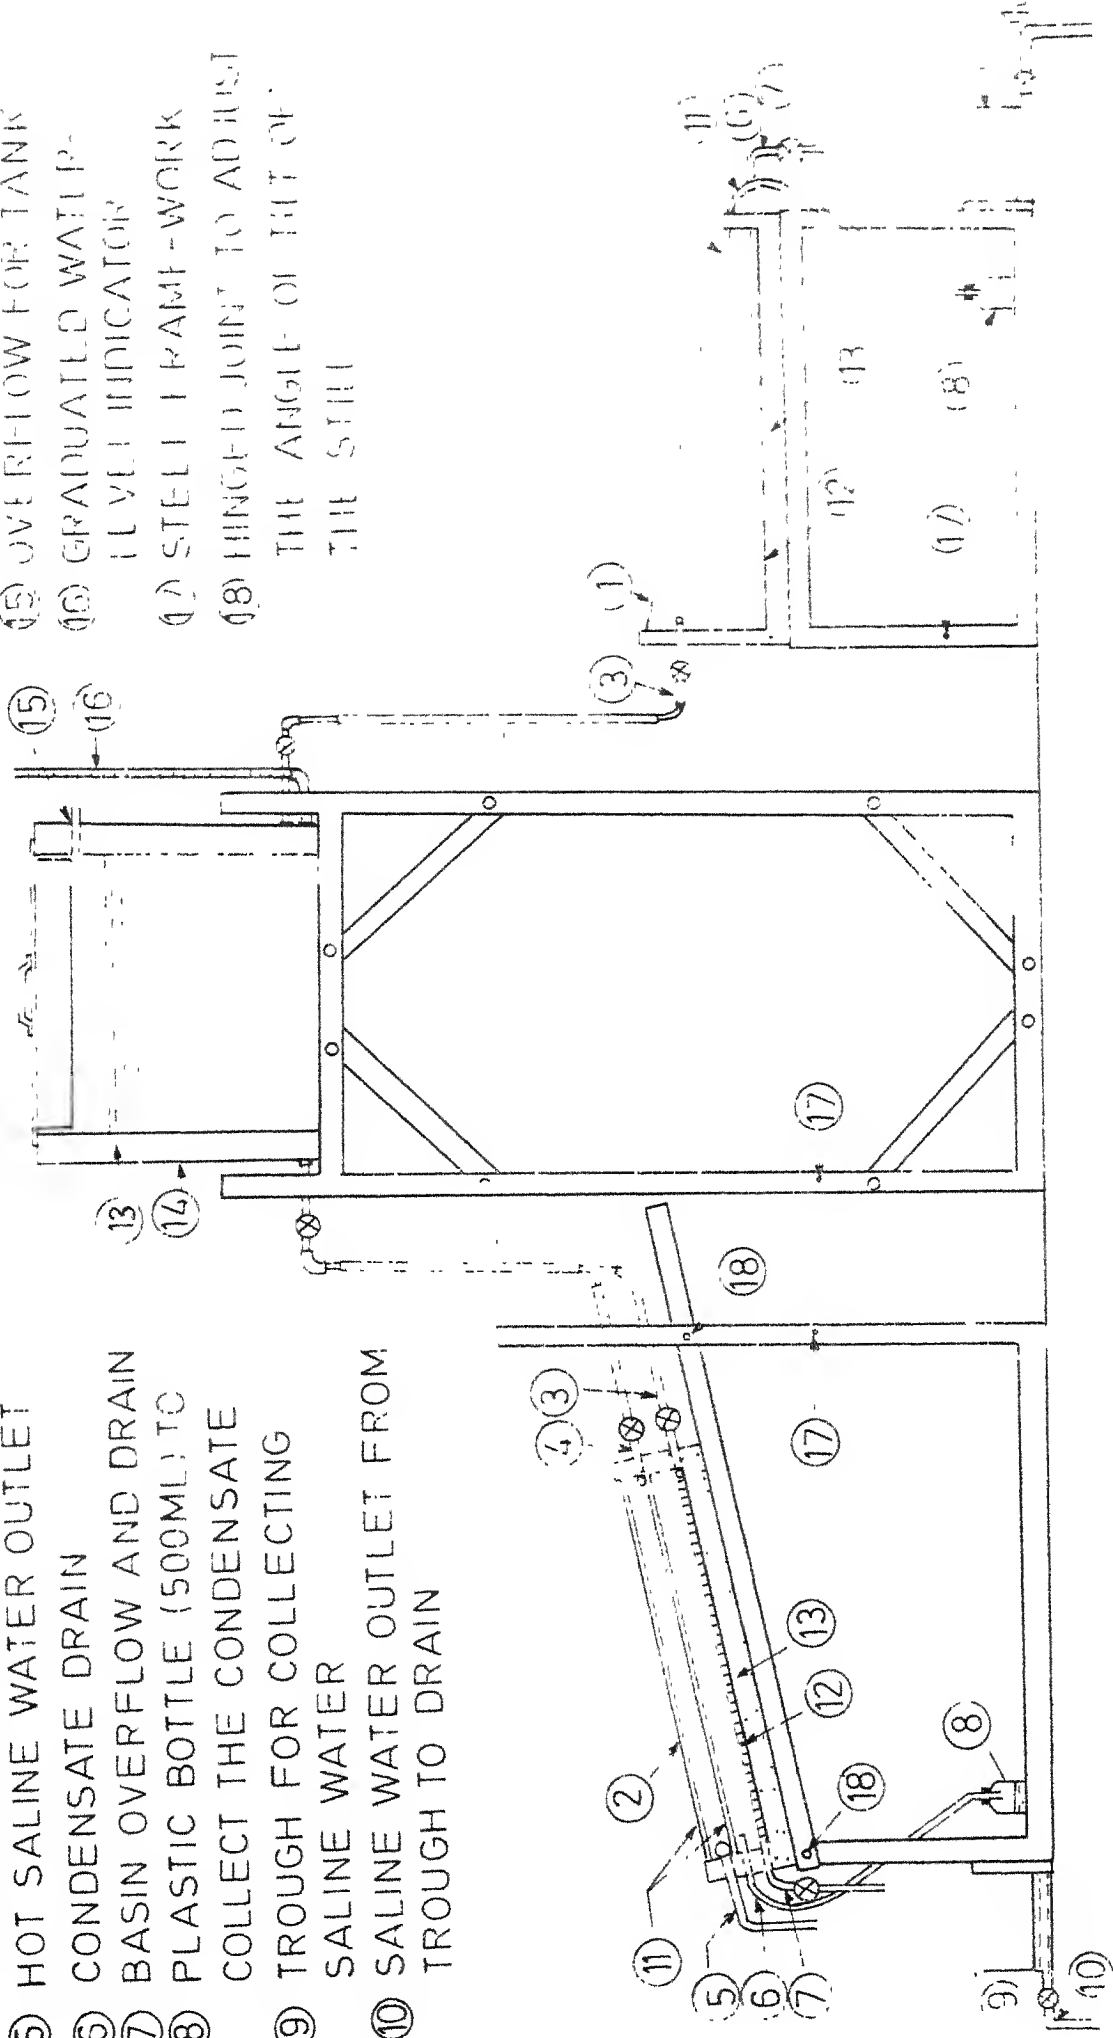


FIG.21 SCHEMATIC DIAGRAM OF THE EXPERIMENTAL SET-UP

Common window glass (60cms x 60cms, 5.5 mm thick) is used for the top covers of the still. Glass transmits incoming solar radiation in the range of 0.3 to 3.0 microns, but is opaque to radiation emitted by the hot absorber plate and the water surface, beyond 4.8 microns. Hence, the still serves as a hot-box. The glass cover rests on aluminium angles, fixed along the periphery of the box. It is sealed to the box by means of rubber gaskets and adhesive along its four sides to make it air-tight, so that no water-vapours may leak outside through the edges. A gap of 5 cms is maintained between the basin water surface and the glass cover. This distance of 5 cms was chosen to reduce the shading of the basin water surface by the lateral walls of the solar still and also to decrease the fabrication cost. The top glass cover, similarly, rests lightly on aluminium angles, provided with rubber gaskets, along the periphery of the box, but it is removeable. The top glass cover is periodically treated with dilute hydrochloric acid to remove the formation of dust coatings.

To prevent heat losses from the bottom and sides of the still, the unit is enclosed in a rectangular box (64cms x 64cms x 16.6cms) made of 22 gauge G.I. sheet, and the space in between is filled with 6 cms thick glass wool at the bottom and 2 cms thick on the sides.



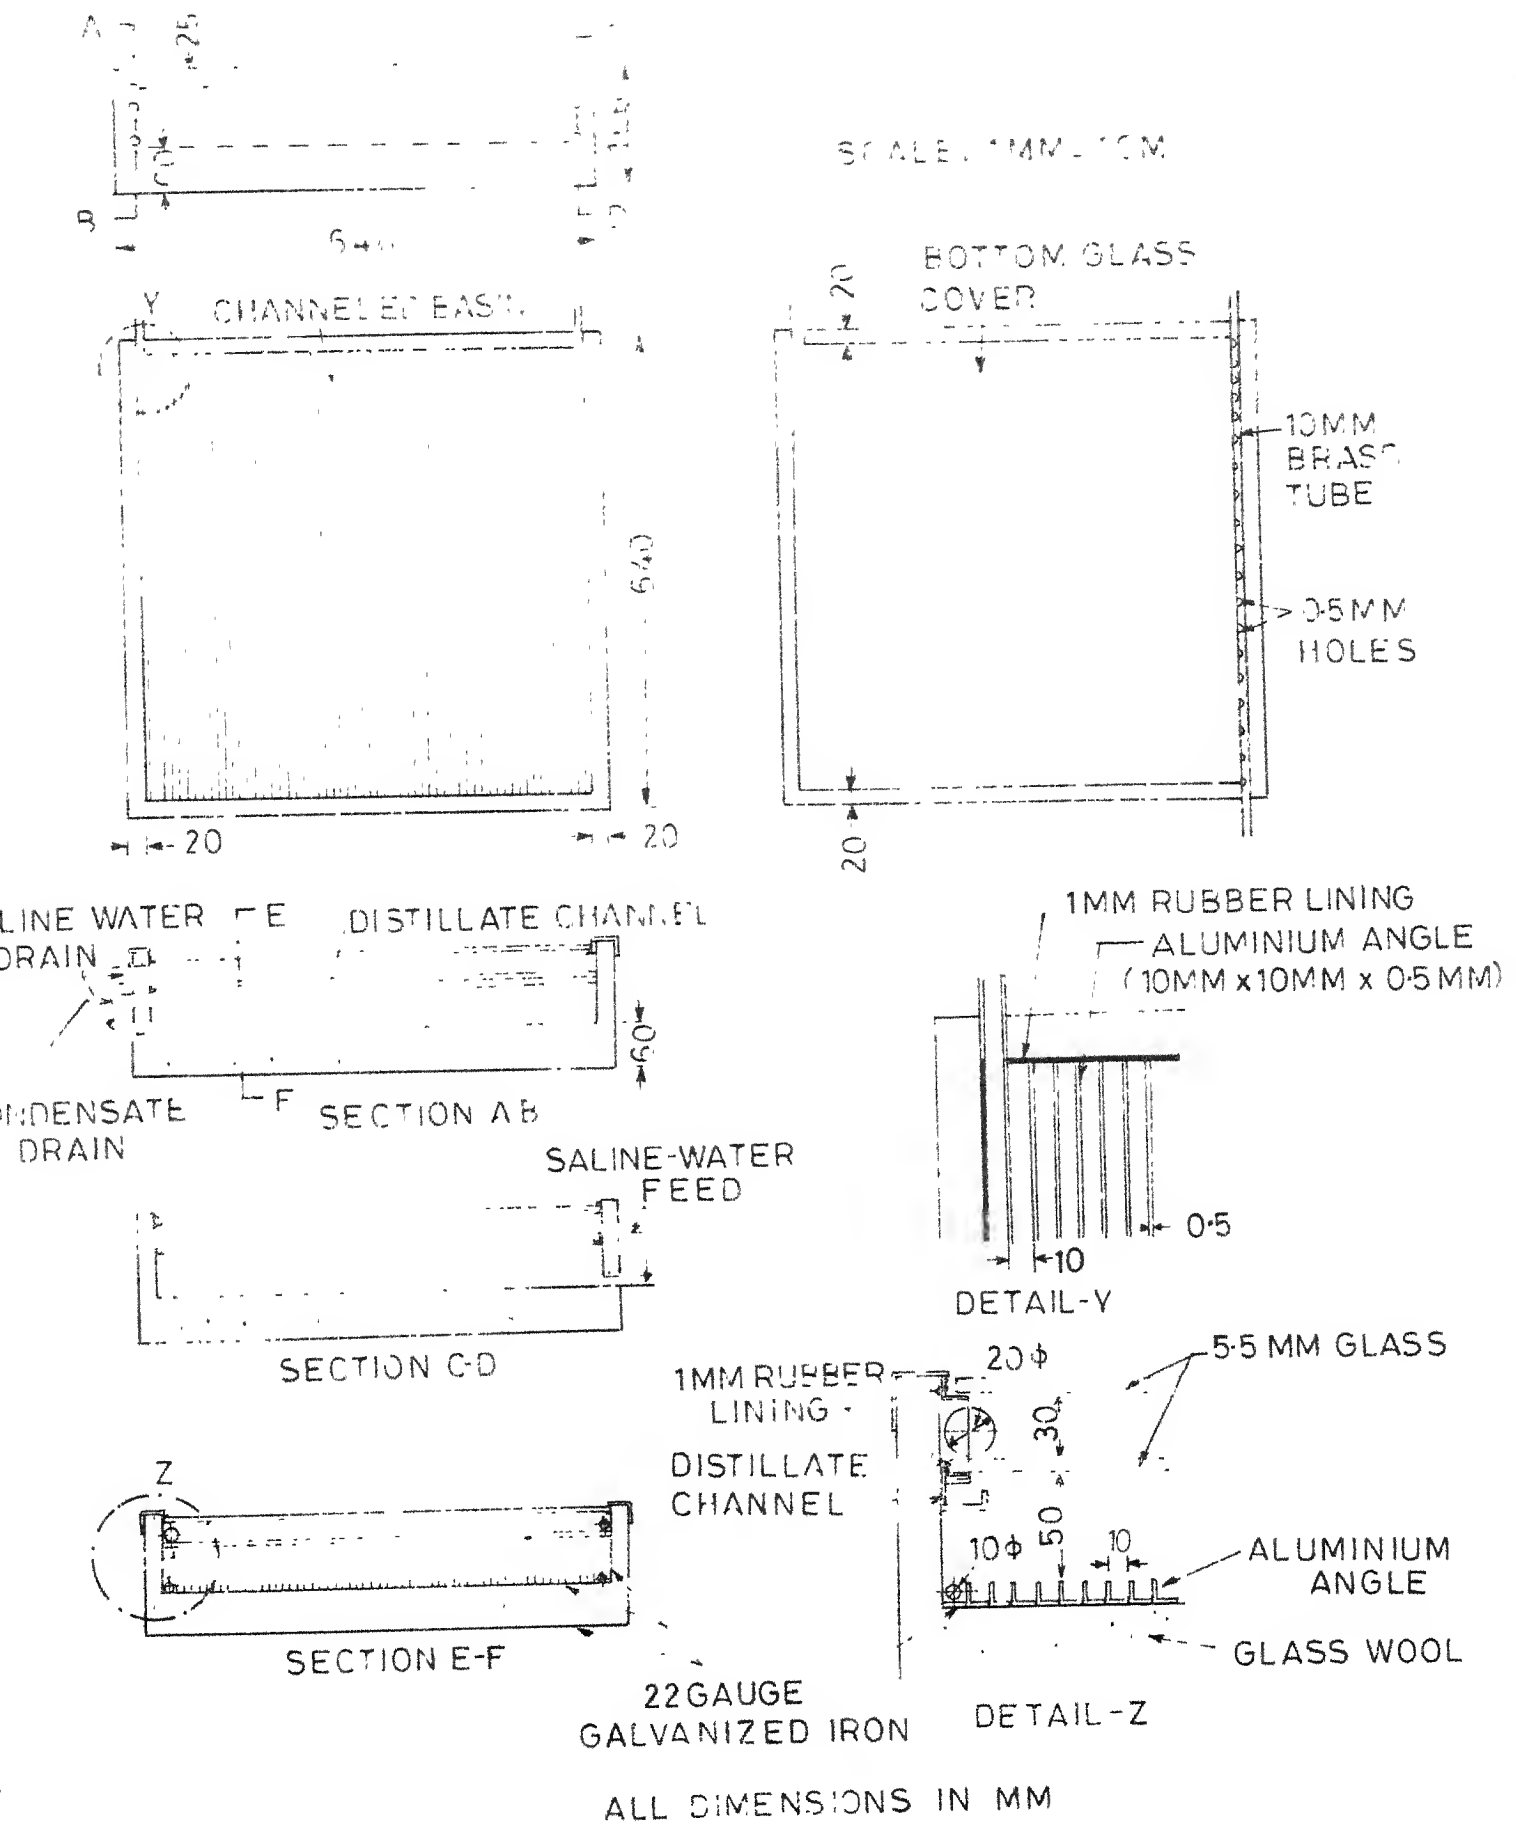


FIG. 2.2 DETAILS OF THE INCLINED SOLAR STILL



2.1.2 THE BASIN-TYPE SOLAR STILL

The constructional details of the basin-type still are shown in Fig. 2.3.

It consists of a box with base dimensions of 60cms x 60 cms, front and rear wall heights of 6 cms and 18.5 cms, respectively. The still has an inclined roof on which rests a 5.5 mm thick glass cover, sloping at an angle of 12° with the horizontal to prevent the condensate from dropping into the basin. The glass cover rests on rubber linings and is secured properly in its place by means of aluminium angles, fixed with screws along the periphery of the still. The condensate slides down the slope of the glass cover, flows in a U-shaped channel from where it is collected in a plastic bottle. Saline water is filled upto a small depth (about 1 cm) in the basin for maintaining a low thermal inertia. The basin surface is painted with black paint mixed with black mesh powder for better absorption of solar radiation.

The basin-type still is also enclosed in a box with base dimensions of 64cms x 64cms, front and rear wall heights of 12 cms and 24.5 cms, respectively. Both the inner and the outer boxes are made of 22 gauge G.I. sheet and the space in between is filled with 6 cms thick glass wool at the bottom and 2 cms thick on the sides to prevent heat losses to the surroundings.

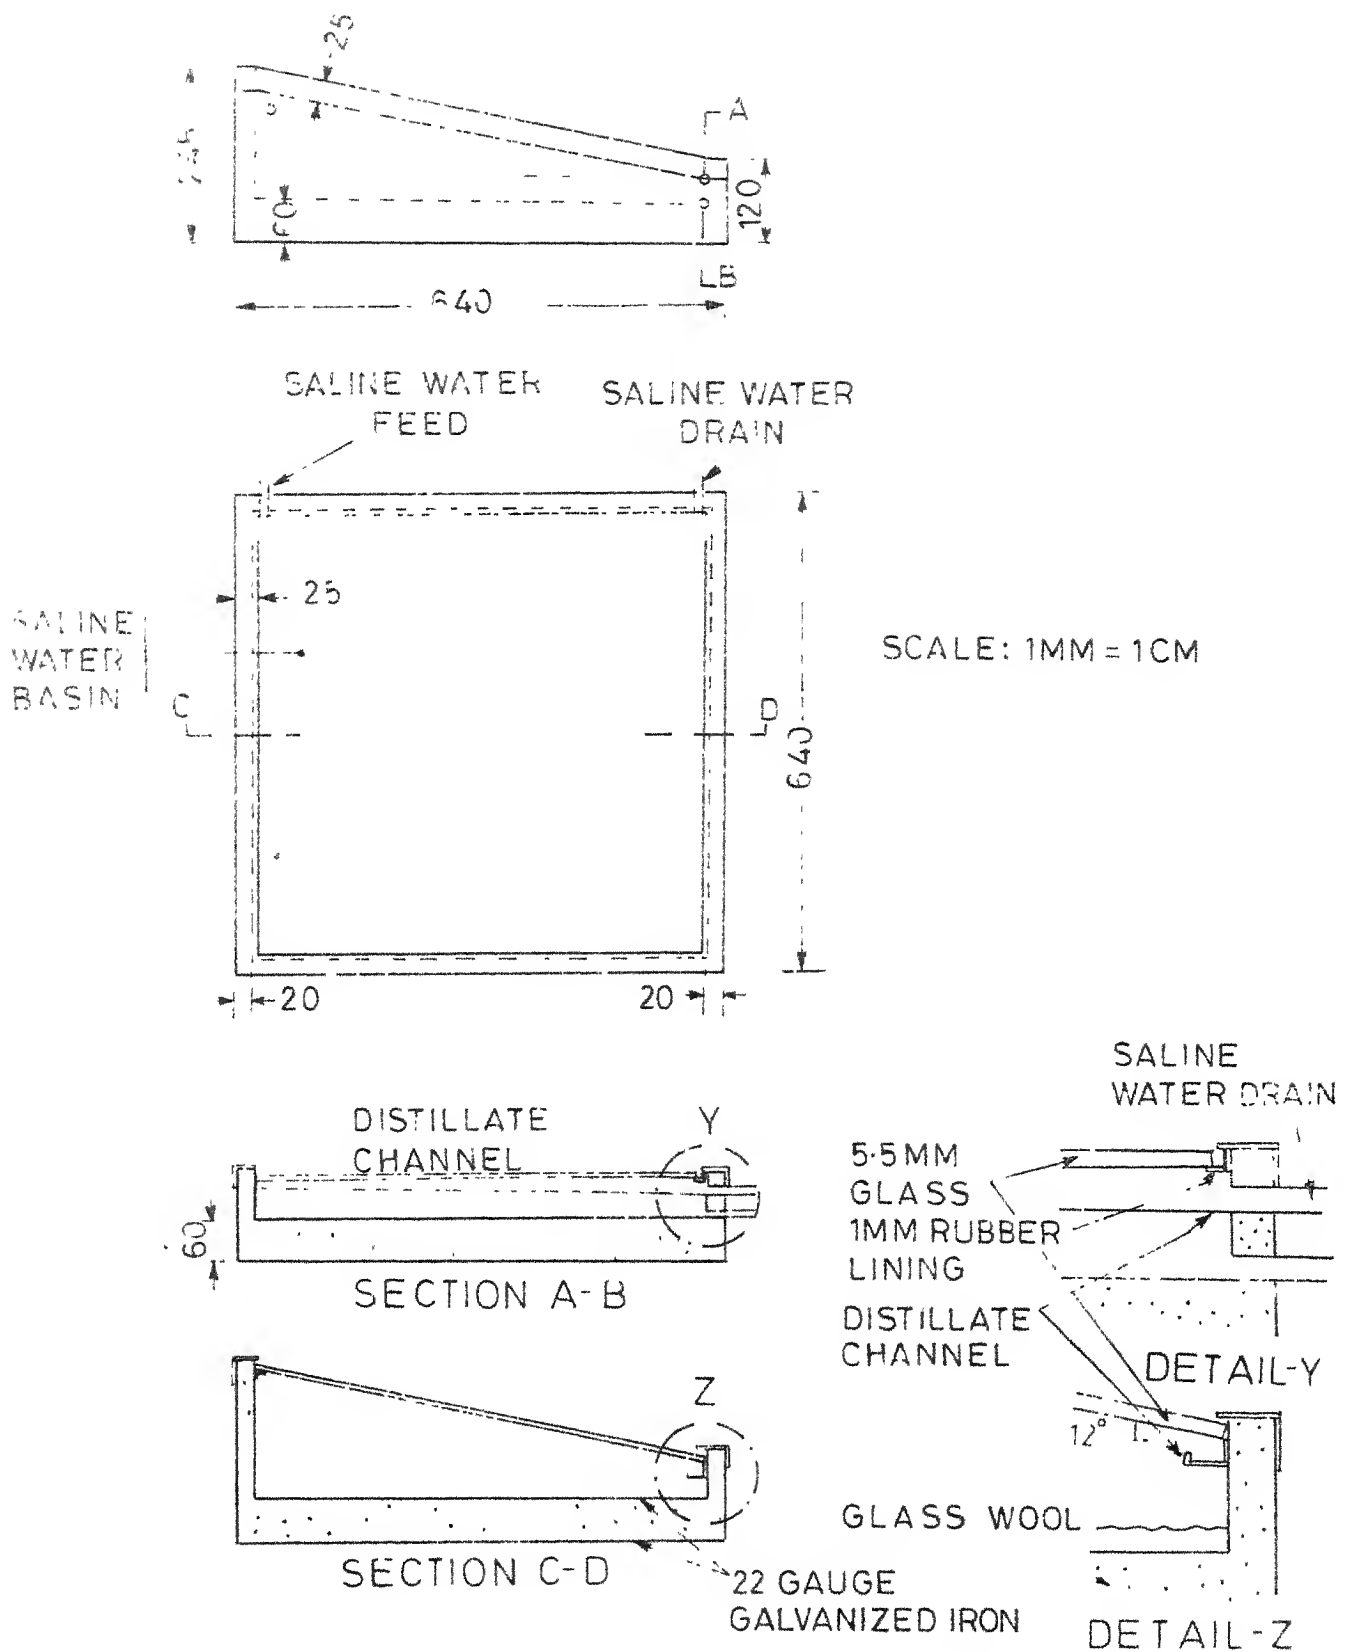


FIG.23 DETAILS OF THE BASIN-TYPE SOLAR STILL



2.1.3 PIPINGS, FITTINGS AND STORAGE TANK

The arrangement of the pipings, valves and other connections for both the stills is shown in Fig.2.1. Polythene pipes with plastic valves and connections have been used for ease of installation and low cost, as well. For the inclined still, the condensate is collected in a U-shaped channel, running along the underside of the glass cover at its edge as shown in Fig.2.2. Also, a 1 cm dia.brass tube with uniformly spaced holes of 2 mm dia.drilled along its length is used to feed the cold saline water to flow over the glass plate. The hot-water obtained as a by-product,flows out through the exit pipe into a trough placed on the ground, from where it is drained away.

A storage tank of capacity 200 litres, is provided to feed the saline water to both the stills. It has two separate valves connected to the outlet pipes of the tank, providing saline water to each basin and cold saline water to cool the bottom glass cover of the inclined still. A graduated water-level indicator made of glass is fitted to the storage tank. The tank is insulated with 6 cms thick glass-wool along its sides to prevent the stored saline-water from being heated up.

2.2 INSTRUMENTATION

2.2.1 TOTAL SOLAR RADIATION MEASUREMENT


The total radiation incident on the basin of the inclined still consists of both the direct and diffuse radiation. An Eppley Pyranometer has been used to measure the total radiation falling on the inclined surface. The instrument was kept facing south and tilted at the angle of inclination of the still, and the output recorded on an hourly interval by the Eppley Integrator.

2.2.2 TEMPERATURE MEASUREMENT


All temperatures, except the ambient have been measured by 24 gauge, calibrated copper-constantan, insulated thermocouples, and the output recorded directly on the graph paper by a 24-junction Honey-well Temperature Recorder, having a least count of 1°C . Fig. 2.4 shows the positions of the thermocouples on the inclined still. The top glass cover has four thermocouples fixed to its upper surface by adhesive as shown. Similarly, four thermocouples have been fixed to the underside of the bottom glass cover to measure the average temperature of the condensate film. Four thermocouple wires have been soldered to the channelled basin and four to the bottom surface of the still. Two thermocouples, each immersed in the flowing water film were used to measure the inlet and outlet temperatures of the water film. Ambient temperature was measured by a mercury-in-glass thermometer with a least count of 1°C , placed in shade.



POSITION OF THERMOCOUPLES	NUMBER	TEMPERATURE
A	4	T_g
B	4	T_2
C	4	T_1
D	4	T_b
E	1	T_{wi}
F	1	T_{wo}

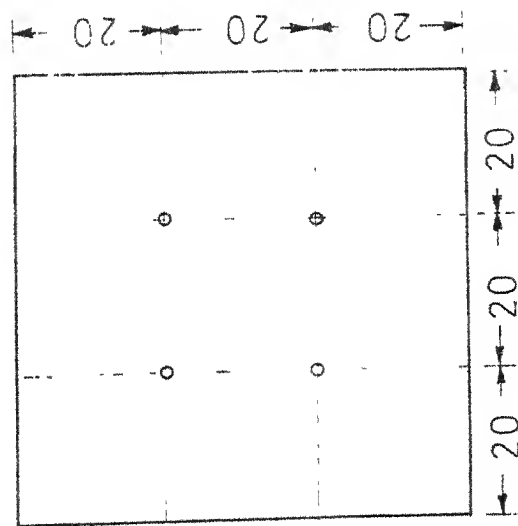

TOP VIEW

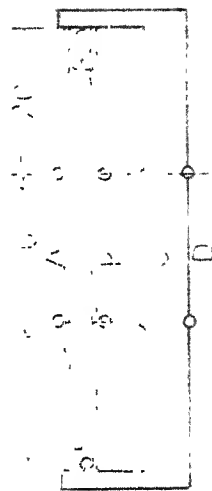

SIDE VIEW

ALL DIMENSIONS IN MM

FIG.24 POSITIONS OF THERMOCOUPLES FOR THE INCLINED SOLAR STILL

2.2.3 FLOW MEASUREMENT

A graduated, water-level indicator made of glass, fitted to the storage tank, as shown in Fig.2.1, is used to note the decrease in the level of saline water over an hourly interval of time. Knowing the area of cross-section of the tank, the mass flow rate of saline water can be found out.

The condensate collected in plastic bottles was measured on an hourly basis by means of a graduated cylinder of 500 ml capacity, having a least count of 5 ml.

2.2.4 WIND VELOCITY MEASUREMENT

Due to non-availability of a windscope, the velocity of wind was measured by means of a rotating, vane-type anemometer, which was adjusted every time to take into account the change in the direction of the wind velocity.

2.3 MODES OF TEST

The performance of the inclined still was tested under two modes of operations.

In the first mode, the top glass cover (which is removeable) was placed over the still to prevent cooling of the film of flowing water due to its surface being exposed to the ambient, thus retaining the hot water which often reached more than 48 °C during the peak hours of sunshine. This arrangement, however, decreased the amount of incoming radiation due to the addition of the top glass cover, resulting in lower yield.

The second mode of test was conducted with the top glass cover removed. In this case, yield of distillate was more, but the temperature of the hot water was substantially reduced due to the rapid heat loss from the water film to the ambient.

CHAPTER - 3

HEAT AND MASS TRANSFER ANALYSIS OF THE INCLINED SOLAR STILL

3.1 HEAT BALANCE OF THE STILL

Assuming steady-state operation of the still, the following equations can be written :

Heat balance for basin water :

$$q_a = q_c + q_r + q_e + q_b \quad (3.1)$$

Heat balance for the bottom glass cover :

$$q_c + q_r + q_e = \frac{\dot{m}}{A_g} c_p (T_{w_o} - T_{w_i}) + q_{\#} \quad (3.2)$$

where,

- q_a - incident solar energy flux absorbed by the basin-water,
- q_c - heat flux due to natural convection from the basin-water surface to the glass cover,
- q_r - heat flux due to radiation from the basin-water surface to the glass cover,
- q_e - heat flux due to evaporation and condensation from the basin-water to the glass cover,

- q_b - heat flux due to back losses from the basin to the surroundings,
 q_g - heat flux due to upward losses from the glass cover to the surroundings,
 \dot{m} - mass flow rate of saline water over the glass cover,
 A_g - area of the glass cover,
 T_{wi}, T_{wo} - inlet and outlet temperatures of the saline water flowing over the glass cover, respectively.

The various heat fluxes are evaluated in the following sections :

3.2 HEAT FLUX DUE TO NATURAL CONVECTION

The process of heat transfer inside the still is due to natural convection arising as a result of the density difference of the fluid enclosed between the two parallel surfaces, the basin surface at temperature T_1 and the glass surface at temperature T_2 , where $T_1 > T_2$. Under such circumstances, the heat transfer coefficient is obtained from the empirical relation⁷,

$$Nu = [2.44 + \{2.23 - 0.0123\theta + 0.00034\theta^2\} \left\{ \left(\frac{Gr Pr \cos\theta}{Ra_t} \right)^{1/3} - 1 \right\}]$$

$$\text{valid for } 10 < Gr Pr < 4 \times 10^6$$

$$0^\circ < \theta < 60^\circ$$

(3.3)

where,

Nu = Nusselt number

$$= \frac{h_c L}{k}$$

Gr = Grashof number for heat transfer

$$= \frac{g L^3 \rho^2 \beta_t (T_1 - T_2)}{\mu^2}$$

Pr = Prandtl number

$$= \frac{\mu c_p}{k}$$

$$Ra_t = 11300[1 + 0.204 \sin 4.50(\theta - 37.8^\circ)]$$

θ = Angle of inclination of the still with the horizontal

L = Distance between the two surfaces at temperatures T_1 and T_2 , respectively

g = Acceleration due to gravity

β_t = Coefficient of volume-expansion of the air-water vapour mixture in the still

h_c = Convective heat-transfer coefficient

ρ , μ , c_p , and k denote the density, viscosity, specific heat and thermal conductivity of the mixture in the still.

The term $\beta_t(T_1 - T_2)$, known as the 'buoyancy factor' for heat transfer was originally evaluated for conditions of constant

composition of the convecting fluid, and was given by

$$\beta_t (T_1 - T_2) = \frac{T_1 - T_2}{(T_1 + T_2)/2}$$

However, in the still, the humidity of the air and, therefore, its composition changes along the flow path. The vapour formed in the still is lighter than the dry air component and therefore, increases the buoyant force and the rate of circulation of the air and associated vapour. The modified expression for the buoyancy factor as derived in Appendix-1 is given by

$$\beta_t (T_1 - T_2) = \frac{T_1 - T_2}{T_2} + \left[\frac{p_{A1} - p_{A2}}{\left(\frac{M_B}{M_B - M_A}\right)p - p_{A1}} \right] \frac{T_1}{T_2} \quad (3.4)$$

where,

p_{A1} = partial pressure of saturated water-vapour
at temperature T_1 .

p_{A2} = partial pressure of saturated water-vapour
at temperature T_2 .

p = total pressure inside the still
(assumed at 1 atmosphere).

M_A = Molecular weight of water-vapour.

M_B = Molecular weight of dry air.

The expression (3.4) is used to determine the Grashof number occurring in expression (3.3).

The heat flux due to convection is given by

$$q_c = h_c (T_1 - T_2)$$

where, the heat transfer coefficient is evaluated from equation (3.3).

3.3 HEAT FLUX DUE TO RADIATION

The heat transfer due to radiation can be approximated as taking place between two parallel surfaces of equal areas enclosing a non-absorbing, non-emitting medium. The radiation involved is diffuse radiation in the long wavelength range, for which the glass and water can be treated as grey surfaces ($\epsilon_\lambda = \epsilon$). Under such circumstances, the heat transfer due to radiation is expressed as

$$q_r = F \sigma (T_1^4 - T_2^4)$$

where,

σ = Stefan-Boltzmann constant

$$= 5.67 \times 10^{-8} \frac{\text{Watts}}{\text{m}^2 \cdot \text{K}^4}$$

F = Shape factor

$$= \frac{1}{\frac{1}{\epsilon_w} + \frac{1}{\epsilon_g} - 1}$$



ϵ_w = emissivity of the saline-water in the basin.

$\epsilon_{g'}$ = emissivity of the water film-glass glazing.

Taking the emissivities of saline-water and glazing as 0.96 and 0.95, respectively, we obtain $F = 0.9$. Hence,

$$q_r = 0.9 \sigma (T_1^4 - T_2^4) \quad (3.5)$$

3.4 HEAT FLUX DUE TO EVAPORATION AND CONDENSATION

In addition to convection and radiation, the bulk of the heat transferred upwards is due to evaporation of water from the basin surface and its subsequent condensation on the glass cover. The evaluation of the heat transfer due to evaporation and condensation is carried out in three steps, namely, evaluation of

- (i) mass-transfer coefficient,
- (ii) rate of mass-transfer,
- and (iii) heat flux due to evaporation and condensation.

(i) Evaluation of the mass-transfer coefficient :

The process of heat transfer due to natural convection inside the still is accompanied by mass-transfer due to evaporation of water from the basin. For the case of simultaneous heat and mass transfer inside a fixed geometry and in the absence of any chemical reaction, it may be shown that the



governing equations and the boundary conditions for heat and mass transfer processes are similar and hence, they can be treated as analogous in nature⁸. The solution of heat transfer problem in case of natural convection can be written in terms of dimensionless quantities as follows:

$$Nu = f(Gr, Pr)$$

Since the heat and mass transfer processes are analogous, the solution of mass-transfer problem can be written as

$$Sh = f(Gr_m, Sc)$$

where, the functional relationships are the same⁹.

The dimensionless quantities in the above equations are:

$$Sh = \text{Sherwood number}$$

$$= \frac{h_D L}{\rho_{D_{AB}}}$$

$$Sc = \text{Schmidt number}$$

$$= \frac{\mu}{\rho_{D_{AB}}}$$

$$\text{and } Gr_m = \text{Grashof number for mass-transfer}$$

$$= \frac{g L^3 \rho^2 \beta_m (c_1 - c_2)}{\mu^2}$$

where, h_D and D_{AB} denote the mass-transfer coefficient and diffusion coefficient, respectively, of water-vapour in air.

c_1 and c_2 denote the concentrations of air water-vapour mixture at the lower and upper surfaces of the still, respectively.

β_m is known as the coefficient of densification which indicates the variation of density with composition for mass-transfer.

The term $\beta_m(c_1 - c_2)$ is evaluated in a similar manner as the term $\beta_t(T_1 - T_2)$ [See Appendix-1] and is given by

$$\beta_m(c_1 - c_2) = \frac{T_1 - T_2}{T_1} + \left[\frac{p_{A1} - p_{A2}}{\left(\frac{M_B}{M_B - M_A} \right) p - p_{A2}} \right] \frac{T_2}{T_1} \quad (3.6)$$

The expression (3.6) is used to determine the value of Gr_m .

Hence, in equation (3.3), after replacing Nu by Sh , Gr by Gr_m and Pr by Sc and solving for the mass transfer coefficient, we get,

$$h_D = \frac{D_{AB}}{L} [2.44 + \{ 2.23 - 0.0123\theta + 0.00034\theta^2 \} \left\{ \left(\frac{Gr_m Sc \cos\theta}{Ra_t} \right)^{1/3} - 1 \right\}] \quad (3.7)$$

(ii) Evaluation of the rate of mass-transfer

Let the two components of the gaseous mixture inside the still, consisting of water vapour and air be denoted by A and B, respectively. The molar flux of component A in the z - direction is given by ^{10,11}

$$N_{Az} = h_D \frac{p}{R_u T} \left(\frac{p_{A1} - p_{A2}}{p_{B1m}} \right) \quad (3.8)$$

where p_{B1m} = log-mean pressure of component B

T = mean temperature of the mixture

R_u = Universal Gas Constant

For normal air, water-vapour mixture at atmospheric pressure, the partial pressure of one component does not vary significantly in comparison to the total pressure¹². Hence,

$$p_{B1m} \approx \frac{p_{B1} + p_{B2}}{2}$$

From Dalton's Law of partial pressure,

$$p_A + p_B = p$$

Therefore,

$$\begin{aligned} p_{B1m} &= \frac{(p - p_{A1}) + (p - p_{A2})}{2} \\ &= \left(\frac{2p - p_{A1} - p_{A2}}{2} \right) \end{aligned} \quad (3.9)$$

Substituting the value of p_{B1m} in Eqn. (3.8) and denoting N_{Az} by N , we obtain,

$$N = h_D \frac{p}{R_u T} \frac{(p_{A1} - p_{A2})}{(2p - p_{A1} - p_{A2})/2} \quad (3.10)$$

Thus, N denotes the mass-transfer rate of water-vapour due to evaporation. The value of h_D is obtained from Eqn. (3.7). The properties of the mixture are evaluated^{13,14} at the mean temperature, $(T_1 + T_2)/2$.

(iii) Heat Flux due to evaporation and condensation :

The heat flux due to evaporation and condensation is given by

$$q_e = N h_{fg}$$

where, h_{fg} denotes the latent heat of condensation evaluated¹⁴ at the glass temperature T_2 .

A computer programme to evaluate the mass-transfer rate alongwith the upward heat fluxes due to convection, radiation and evaporation is included in Appendix-2.

3.5 HEAT FLUX DUE TO BACK LOSSES FROM THE BASIN TO THE SURROUNDINGS

The heat transfer due to back losses is given by,

$$q_b = \frac{k}{b} (T_1 - T_b)$$

where, k = thermal conductivity of the glass wool insulation,
 b = thickness of glass-wool insulation at the bottom,
 T_b = temperature of the back surface of the still.

3.6 HEAT FLUX DUE TO UPWARD LOSSES FROM THE GLASS COVER TO THE SURROUNDINGS

The rate of heat dissipation depends both on radiation to the sky and on convection by air circulation. Radiation to the sky depends on the equivalent sky temperature, T_{sky}^* . The convective portion, is taken as a function of wind velocity. The total heat flux is given by

$$q_g = \epsilon_g \sigma [T_g^4 - (T_a - 11)^4] + h'_c (T_g - T_a)$$

where,

T_g = temperature of the top glass cover,

T_a = temperature of the ambient,

ϵ_g = total emissivity of glass (taken as 0.95),

* The sky can be considered as blackbody at some equivalent sky temperature, which accounts for the fact that the atmosphere is not at a uniform temperature. Among the several expressions proposed for evaluating the sky temperature, the one which is most commonly used is given by

$$T_{\text{sky}} = T_a - 11,$$

where, T_{sky} and T_a denote the sky temperature and ambient temperature in $^{\circ}\text{C}$, respectively.

σ = Stefan-Boltzmann constant

$$= 5.67 \times 10^{-8} \frac{\text{Watts}}{\text{m}^2 \cdot \text{K}^4}$$

h'_c = outside convective heat-transfer coefficient,
and is given by¹⁵

$$\frac{h'_c W}{k} = 0.028 \text{Re}^{0.8}$$

where, W = width of the still, and

Re = Reynold's number

$$= \frac{\rho v_{\text{ave}} W}{\mu}$$

v_{ave} = Average wind velocity.

ρ , μ and k denote the density, viscosity and thermal conductivity of the air, evaluated¹³ at the film temperature, $\left(\frac{T_g + T_a}{2}\right)$.

The heat flux, q , obtained experimentally, as shown above, is compared with the value calculated from Eqn. (3.2) and the results shown in column 8 of Table 4.1(b).

3.6 EFFECTIVENESS OF THE GLASS-COVER ASSEMBLY AS A HEAT EXCHANGER

The glass-cover assembly serves as a heat exchanger in which heat transfer takes place between the water-film enclosed by the cover assembly and the upward heat fluxes due to convection, radiation and evaporation. Neglecting the

small amount of heat transfer in the inlet pipes, the saline water enters at the outlet temperature of the water in the tank, and leaves at a considerably higher temperature due to the heat gained, as it flows over the glass surface. The effectiveness, E of the cover-assembly as a heat exchanger can be defined as the ratio of the actual quantity of heat removed by the flowing water to the maximum possible heat transferred to the water. i.e.

$$E = \frac{\frac{\dot{m}}{A_g} c_p (T_{w_o} - T_{w_i})}{q_c + q_r + q_e}$$

3.7 STILL EFFICIENCY

A measure of the performance of a still is the conversion efficiency, defined as the ratio of heat transferred in condensation process over any time period to the incident solar energy over the same time period¹⁶,

i.e.

$$\eta = \frac{\int q_e d\tau}{\int I_s d\tau}$$

where, I_s = total incident solar radiation (direct + diffuse) falling on the inclined surface under consideration.

τ = time period.

CHAPTER - 4

RESULTS AND DISCUSSIONS

4.1 EXPERIMENTAL PROCEDURE

Experiments on both the inclined and the basin-type stills were carried out over the month of May, 1981, and the data obtained for clear days of uninterrupted sunshine, only, are presented here.

The storage tank was filled every morning with saline water at a concentration of 2.5 gms of salt dissolved per litre of solution. The basins of both the stills were filled next with saline water to a depth of about 1 cm. The saline water inlet valve is then adjusted to maintain a thin film of water flowing over the glass cover, lasting till the end of the day, when the tank becomes nearly empty. The glass cover surface was periodically treated with dilute hydrochloric acid to maintain the uniform flow of water and to prevent the formation of dry patches. Readings were taken at hourly intervals of time, starting from 9.00 a.m. till 5.00 p.m.

The inclined still was tested under two modes of operations :

- (i) The top glass cover was retained. This resulted in low yield of distillate but the temperature of hot water available as a by-product was high (about 44°C).

- (ii) The top glass cover was removed. The yield of distillate was high but the hot water temperature was low (about 39°C). Tables 4.1, 4.2 and 4.3 present the experimental data and the results obtained for the two modes of tests carried out on typical summer days.

4.2 ANALYSIS OF THE EXPERIMENTAL DATA AND RESULTS

A graphical representation of the experimental data for the first mode of test is shown in Fig. 4.1. The hourly total insolation on the inclined still is plotted along with the temperatures obtained. From the graph, it is seen that the maximum temperatures of the basin surface (T_1), glass cover (T_2) and the back surface (T_b) are reached sometime after 1 p.m., an hour after the period of maximum insolation. After attaining the maximum temperatures, the curves drop due to the decrease in incoming radiation and increase in heat losses from the basin to the ambient.

The saline water exit temperature, T_{w_o} shows a continuous rise till about 3 p.m. after which it starts decreasing. This may be explained as follows : The rate of discharge of saline water from the storage tank is non-linear in nature as is evident from column-3 of Table 4.1(b). In the morning hours, when the tank is nearly full, the mass flow rate is high and the upward heat fluxes are low due to low intensity of radiation during this period of the day. Hence,

Table 4.1(a): Experimental data obtained for the Inclined still
for the first mode of test (top glass cover
retained)

May 26, 1981

$\theta = 12^\circ$

	Basin water tempe- rature $T_1(^{\circ}\text{C})$	Bottom glass cover tempe- rature $T_2(^{\circ}\text{C})$	Top glass cover tempe- rature $T_g(^{\circ}\text{C})$	Back surface tempe- rature $T_b(^{\circ}\text{C})$	Ambient tempe- rature $T_a(^{\circ}\text{C})$	Flowing saline water temperature	
						Inlet T_{wi} ($^{\circ}\text{C}$)	Outlet T_{wc} ($^{\circ}\text{C}$)
9 am	42	35	33	34	32	32	33
10 am	48	41	34	37	34	33	35
11 am	53	45	36	40	35	34	37
12 noon	57	49	37	43	36	35	40
1 pm	59	53	39	45	37	36	42
2 pm	58	51	40	45	38	37	43
3 pm	54	47	40	43	37	37	44
4 pm	51	44	39	41	36	37	43
5 pm	49	42	38	39	35	36	42

Table 4.1(b) : Results of the test conducted on May 26, 1981 ($\theta = 12^\circ$)

	Total Insolation on the inclined still, I_c $\frac{\text{MJ}}{\text{m}^2/\text{hr}}$	Wind Velocity, v $\frac{\text{m}}{\text{sec}}$	Mass Flow Rate of saline water, \dot{m} $\frac{\text{litres}}{\text{hr}}$	Heat Flux due to Con- vec- tion, q_c $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	Heat Flux due to Radia- tion, q_r $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	Heat Flux due to Evapora- tion		Heat Flux due to Back Losses, q_b $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	Heat Flux from glass cover to ambient		Distillate Output from Inclined still		Disti- llate Output from Basin- type still, H_b $\frac{\text{ml}}{\text{hr}}$	Effecti- veness of heat transfer, E	Effici- ency of inclined still, η	
						q_{eth} $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	q_{exp} $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$		$q_{l,cal}$ $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	$q_{l,m}$ $\frac{\text{KJ}}{\text{m}^2\text{-hr}}$	N_{th} $\frac{\text{ml}}{\text{hr}}$	N_{exo} $\frac{\text{ml}}{\text{hr}}$			η_{th} %	η_{exp} %
9 am- 10 am	2102	1.3	29.0	120.6	160.0	870.1	702.7	22.8	474.5	255	130	105	90	0.52	41.4	33.4
10 am- 11 am	2340	1.55	29.0	116.3	167.8	1073.9	965.5	27.6	406.8	260.6	161	145	140	0.67	55.3	1.3
11 am- 12 noon	3006	1.24	29.0	132.1	218.3	1525.7	1332	32.4	404.6	284.4	230	210	225	0.77	50.3	1.3
12 noon 1 pm	2988	1.24	23.0	111.2	180.7	1552.3	1519	33.6	334.8	310.3	235	230	230	0.82	52	50.8
1 pm- 2 pm	2862	1.0	19.0	110.9	182.5	1605.2	1484	33.6	453.2	329	243	225	230	0.75	56.1	1.9
2 pm- 3 pm	2628	0.67	17.0	112.6	177.5	1416.6	1390	27.6	382	337.3	214	210	195	0.77	53.9	50.6
3 pm- 4 pm	1836	1.15	15.0	114.5	172.5	1248	1128	26.4	274.7	377.3	188	170	120	0.81	66.0	61.5
4 pm- 5 pm	1526	1.20	11.0	116.3	167.8	1072.8	999	24.0	51.8	577	161	150	90	0.66	70.1	61.4

th - theoretical, exp - experimental, cal - calculated, m - measured.

the exit temperature, T_{w_o} of the flowing saline-water, is low. With the gradual decrease in the mass flow rate and increase in the upward heat fluxes during the day, more amount of heat is to be removed by less quantity of water. This results in higher exit temperature, during the later part of the day, till about 3 p.m. After 3 p.m., further decrease in the mass flow rate is accompanied by a decrease in the upward heat fluxes due to low intensity of radiation in the evening hours. This causes a gradual decrease in temperature, T_{w_o} .

The temperature of the saline-water inside the storage tank gradually rises (about 4°C - 5°C throughout the day) due to absorption of heat from the surroundings, but reaches a steady-state after 2 p.m.

The experimental data and the results for the second mode of test are given in Tables 4.2(a) and 4.2(b), respectively, and are plotted in Fig. 4.2. From the graph it is observed that the general pattern of the temperature profiles is similar to that in Fig. 4.1. However, the flowing saline-water outlet temperature, T_{w_o} shows a marked decrease of about 2°C - 8°C throughout the day. This is due to the rapid cooling of the water-film as its surface is being constantly exposed to the ambient. The temperature, T_2 of the condensation surface, is further reduced due to the cooling by the water-film, resulting in higher yield of distillate and better efficiency of conversion.

Table 4.2(a): Experimental data obtained for the Inclined still for the second mode of test (top glass cover removed)

$$\theta = 12^\circ$$

	Basin water tempe- rature $T_1(^{\circ}\text{C})$	Glass cover tempe- rature $T_2(^{\circ}\text{C})$	Back surface tempe- rature $T_b(^{\circ}\text{C})$	Ambient tempe- rature $T_a(^{\circ}\text{C})$	Flowing saline water temperature	
					Inlet T_{wi} ($^{\circ}\text{C}$)	Outlet T_{wo} ($^{\circ}\text{C}$)
9 am	43	34	34	31	32	32
10 am	49	40	36	32	33	34
11 am	54	45	39	35	34	36
12 noon	58	49	42	36	35	38
1 pm	60	51	43	37	36	39
2 pm	58	50	43	37	36	39
3 pm	54	46	41	37	36	39
4 pm	50	42	39	36	36	37
5 pm	46	39	37	35	36	34

Figures 4.3 and 4.4 show the hourly variation of still output obtained for the first and second modes of tests, respectively. From the graphs, it is found that the difference between the theoretical and experimental output of distillate for the inclined still varies from 3 per cent - 20 per cent in case of the first mode of test and 7 per cent - 21 per cent for the second mode of test conducted over the entire period of the day, from 9 a.m. to 5 p.m. The difference in the theoretical and experimental results may be due to the following reasons:

- (i) loss of distillate due to leakage of water-vapour through the linings and dropping of condensate from the glass cover to the basin,
- (ii) loss of distillate during pouring and transferring while taking measurements, and
- (iii) the thin film of condensate adhering to the bottom surface of the glass cover has not been taken into account.

Figure 4.5 shows a comparative study of the cumulative yield for a day for the basin type and the inclined still for the first mode of test. It is seen that the yields of the stills are nearly the same till about 12 noon, after which the yield from the inclined still keeps on gradually increasing for the rest of the day. The total increase in the yield of the inclined still over the basin-type unit is about 10 per cent. From Fig. 4.6, it is found that for the second mode of test, the

ORIGINAL COPY
No. A 70577

when the top glass cover is removed, the total increase in the yield of the inclined still over the basin-type is about 38 per cent. A comparison between Figures 4.5 and 4.6 shows that the cumulative yield of the inclined still in case of the second mode of test is about 17 per cent higher as compared to that of the first mode. This increase in yield in the second mode of test is due to the facts that the bottom glass cover is cooled more effectively by the water film exposed to the ambient and also due to improved evaporation rate of saline water as a result of increased intensity of radiation falling on the basin.

The theoretical as well as the experimental values of efficiency of conversion of saline water into fresh water for the inclined still are plotted over the day for the first mode of test and shown in Fig. 4.7. It is observed that the efficiency of conversion increases during the later part of the day. This may be explained as follows :

Since, the rate of upward heat flux (analogous to the upward heat losses from a collector plate to the ambient) due to the combined effects of convection, radiation and evaporation increases with the decrease in the intensity of solar radiation during the later part of the day, the still efficiency (q_e/I_s) also increases. The theoretical and experimental efficiencies for the second mode of test are plotted in Fig. 4.8. The trend, in this case, is somewhat uniform throughout the day. Comparing the experimental results of Figures 4.7 and 4.8, it is found



Table 4.3 : Comparison of daily total yield of distillate for the two types of stills for the month of May, 1981

	Daily Total Insolation (KWh/m ² -day)	Daily Total yield of Inclined still for 1st mode of test (top glass cover retained) (litres/m ² -day)	Daily Total yield of Inclined still for 2nd mode of test (top glass cover removed) (litres/m ² -day)	Daily Total yield of Basin-type still (litres/m ² -day)
May 11	4.7	3.95	-	3.45
12	4.6	-	4.25	-
13	-	-	-	3.40
14	4.8	3.85	-	-
15	4.75	-	4.2	3.7
16	4.4	3.80	-	-
17	4.7	-	4.3	3.7
18	4.6	4.05	-	3.45
19	4.75	-	4.3	3.45
20	-	-	-	-
21	4.90	4.0	-	-
22	4.80	-	4.7	3.4
23	5.10	4.2	-	-
24	5.25	-	4.9	3.6
25	-	-	-	-
26	5.25	4.0	-	3.65
27	5.10	-	4.80	3.5
28	5.30	4.0	-	3.6
29	4.90	-	4.60	3.55
30	5.10	3.95	-	-
31	5.0	-	4.75	3.7

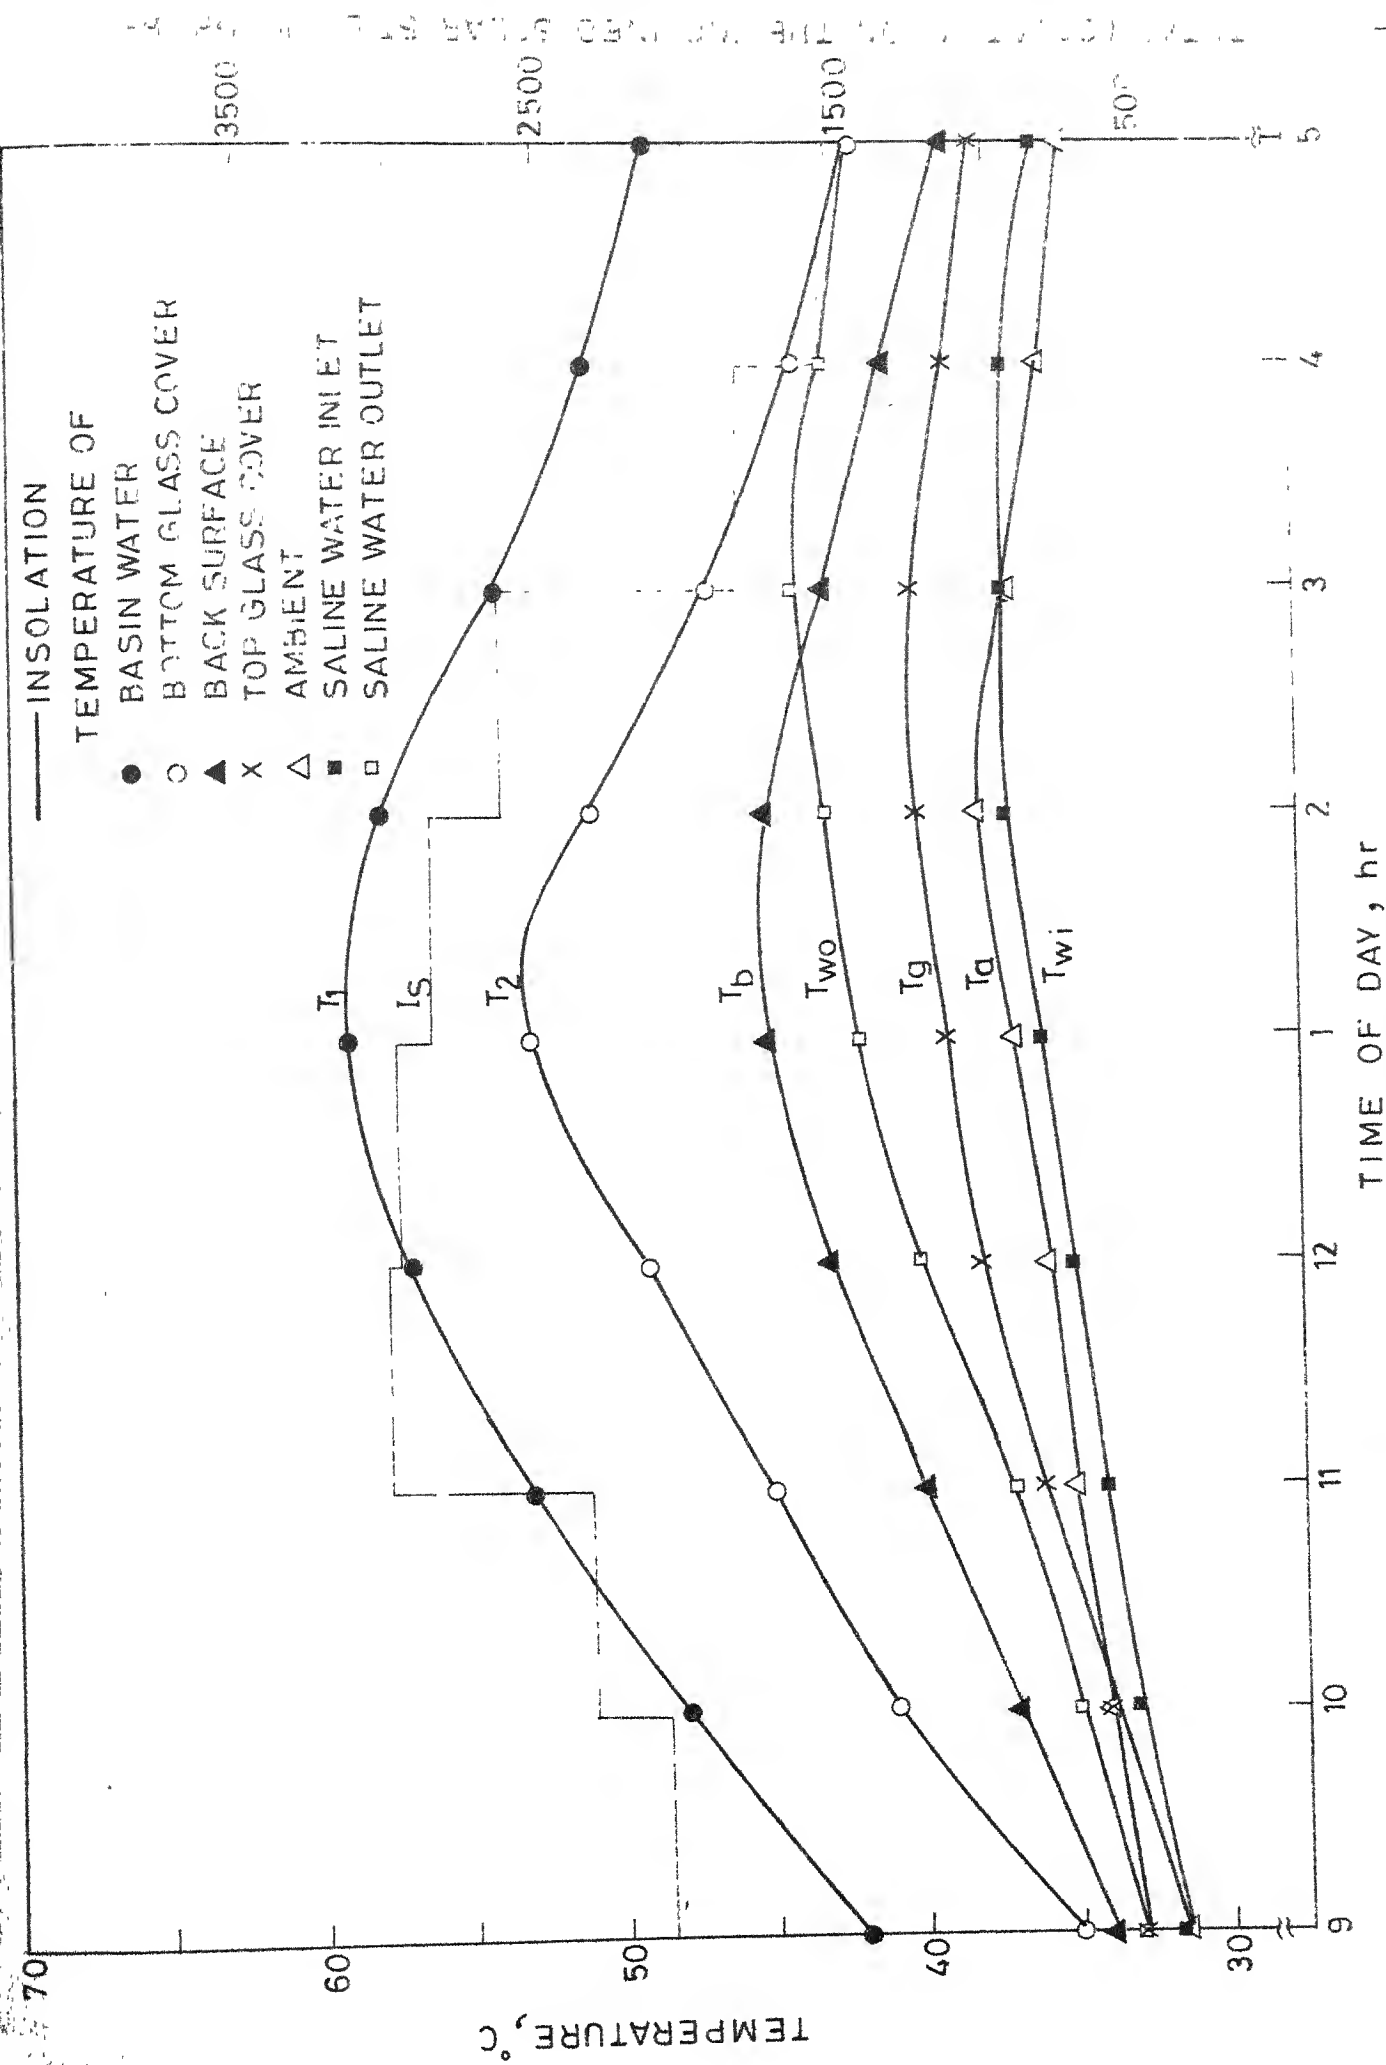


FIG.4-1 EXPERIMENTAL DATA FOR THE FIRST MODE OF TEST
(MAY-26,1981, $\theta=12^\circ$)

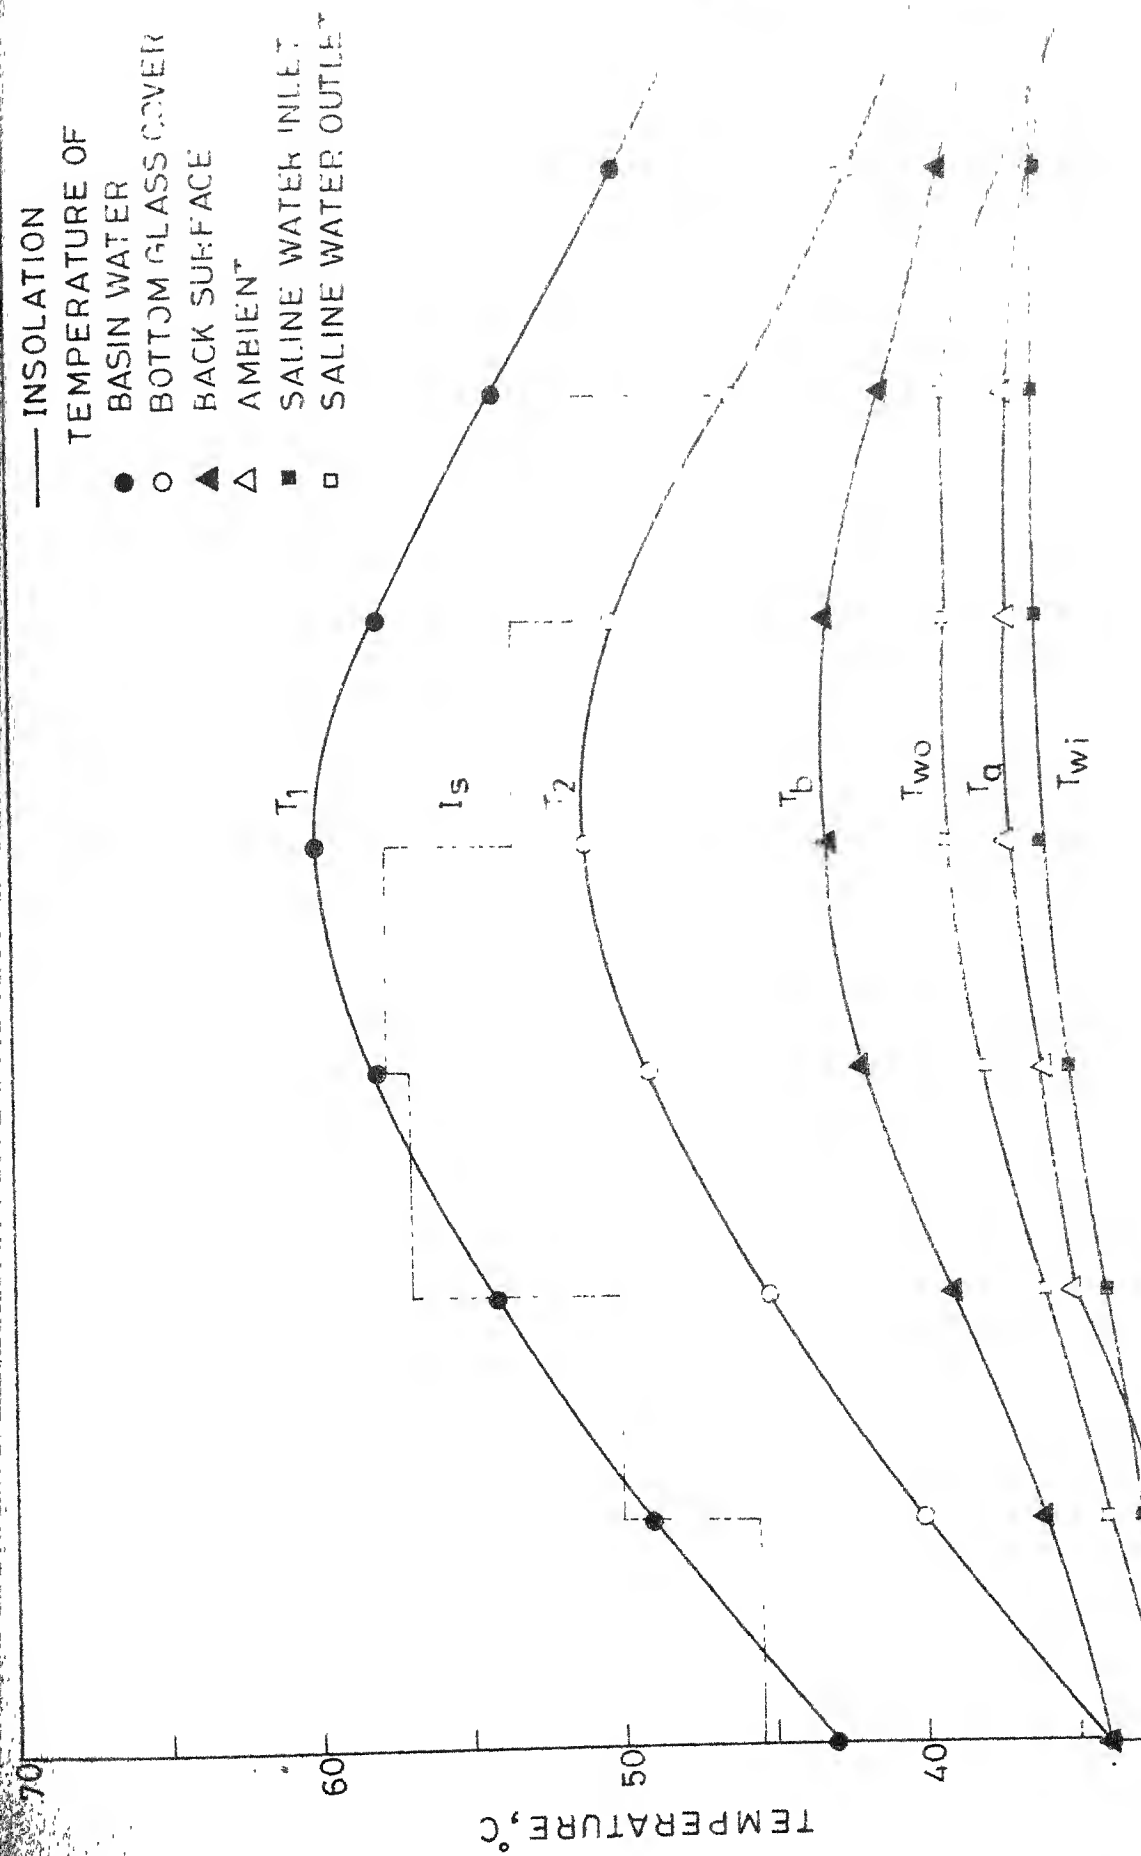


FIG. 4.2 EXPERIMENTAL DATA FOR THE SECTION MAY 27, 1982 @ 12:00

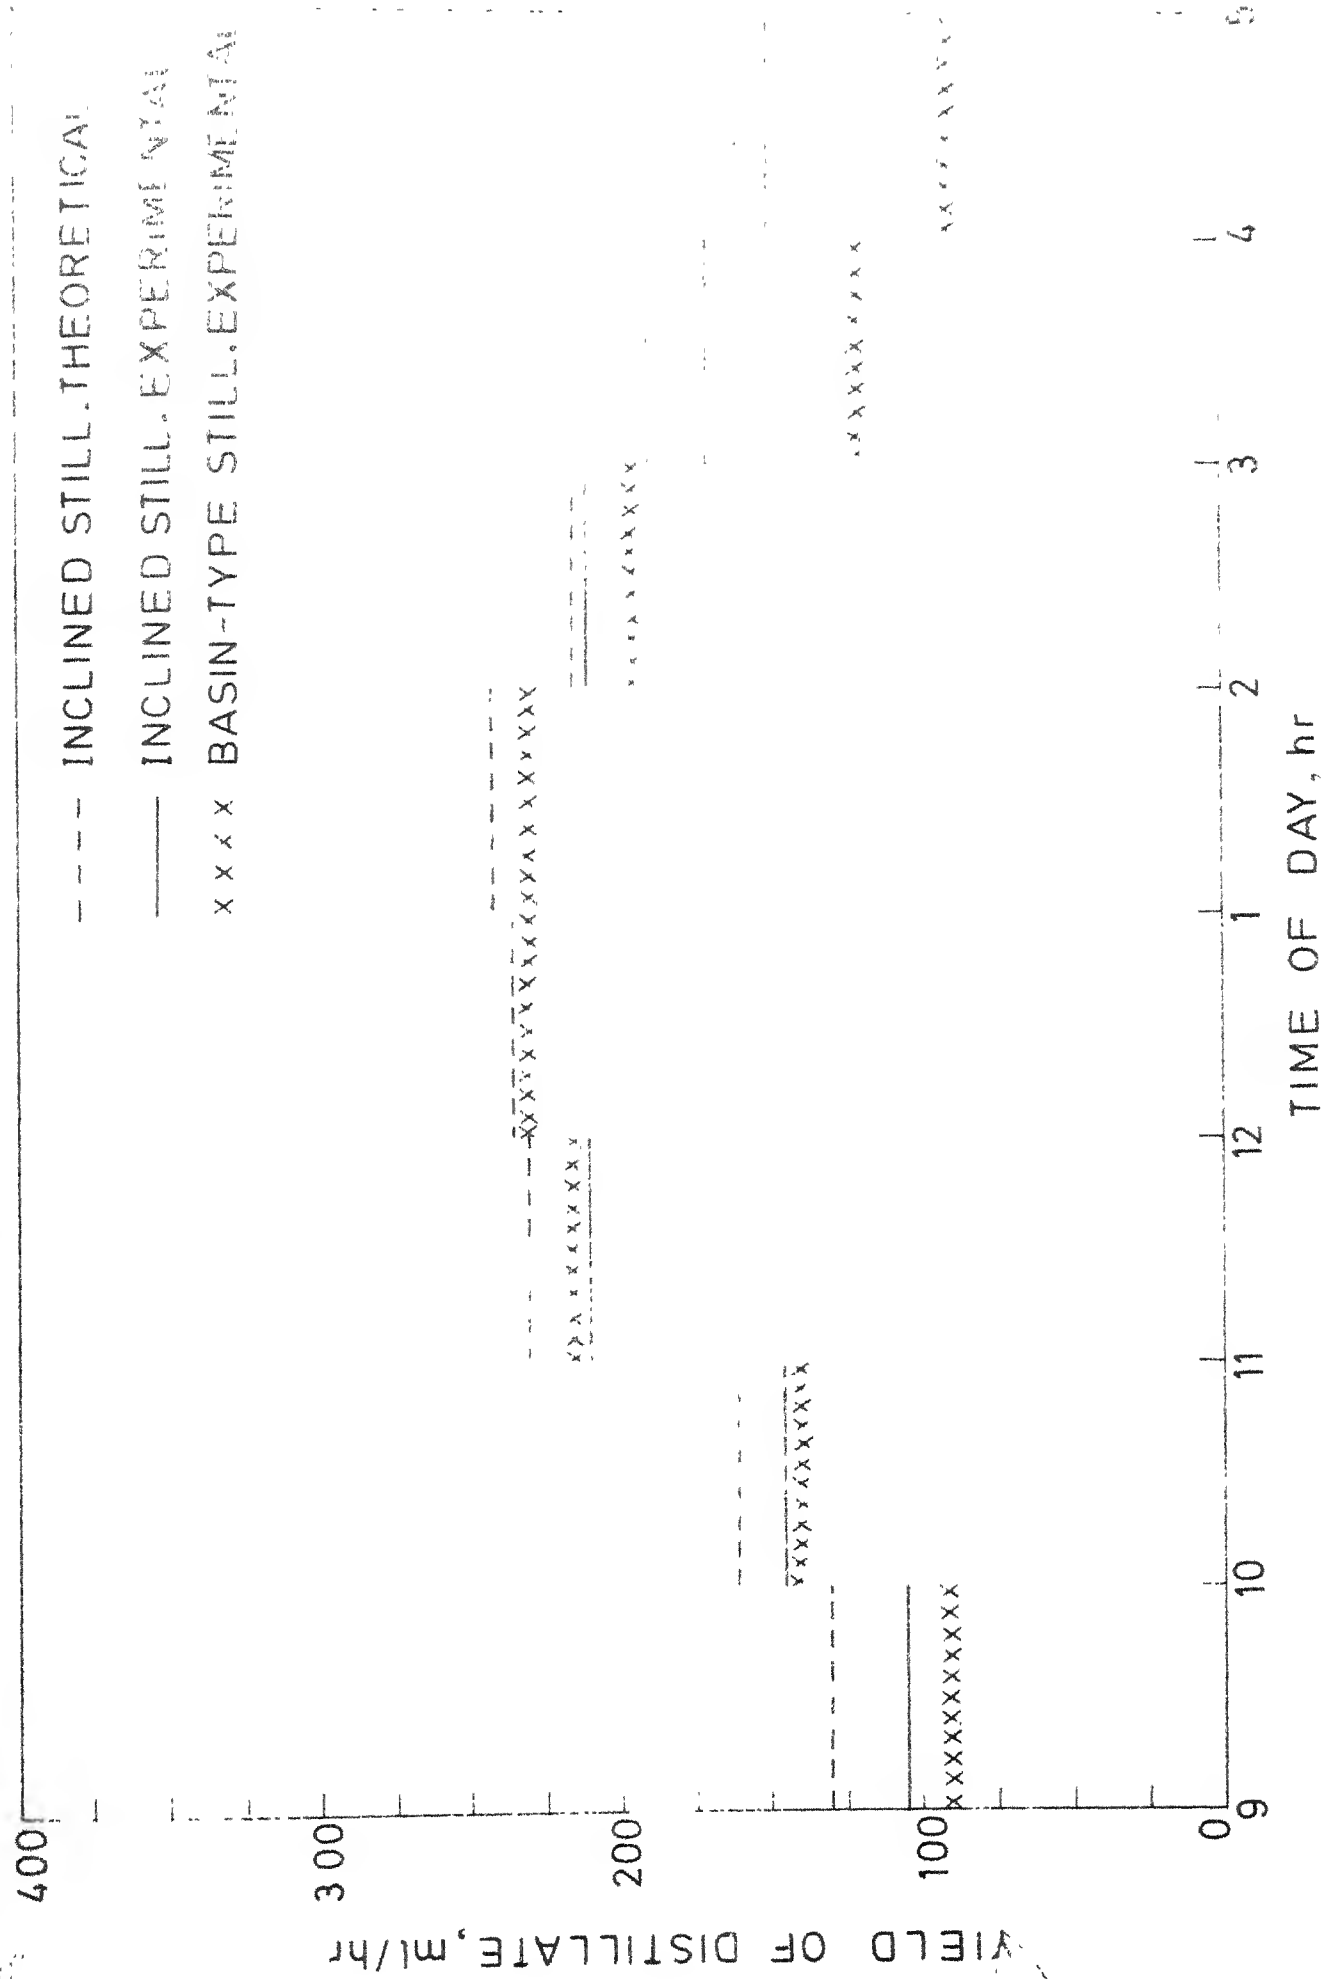


FIG-4.3 VARIATION OF HOURLY YIELD OF DISTILLATE OVER THE DAY FOR THE FIRST MODE OF TEST (MAY 26, 1981)

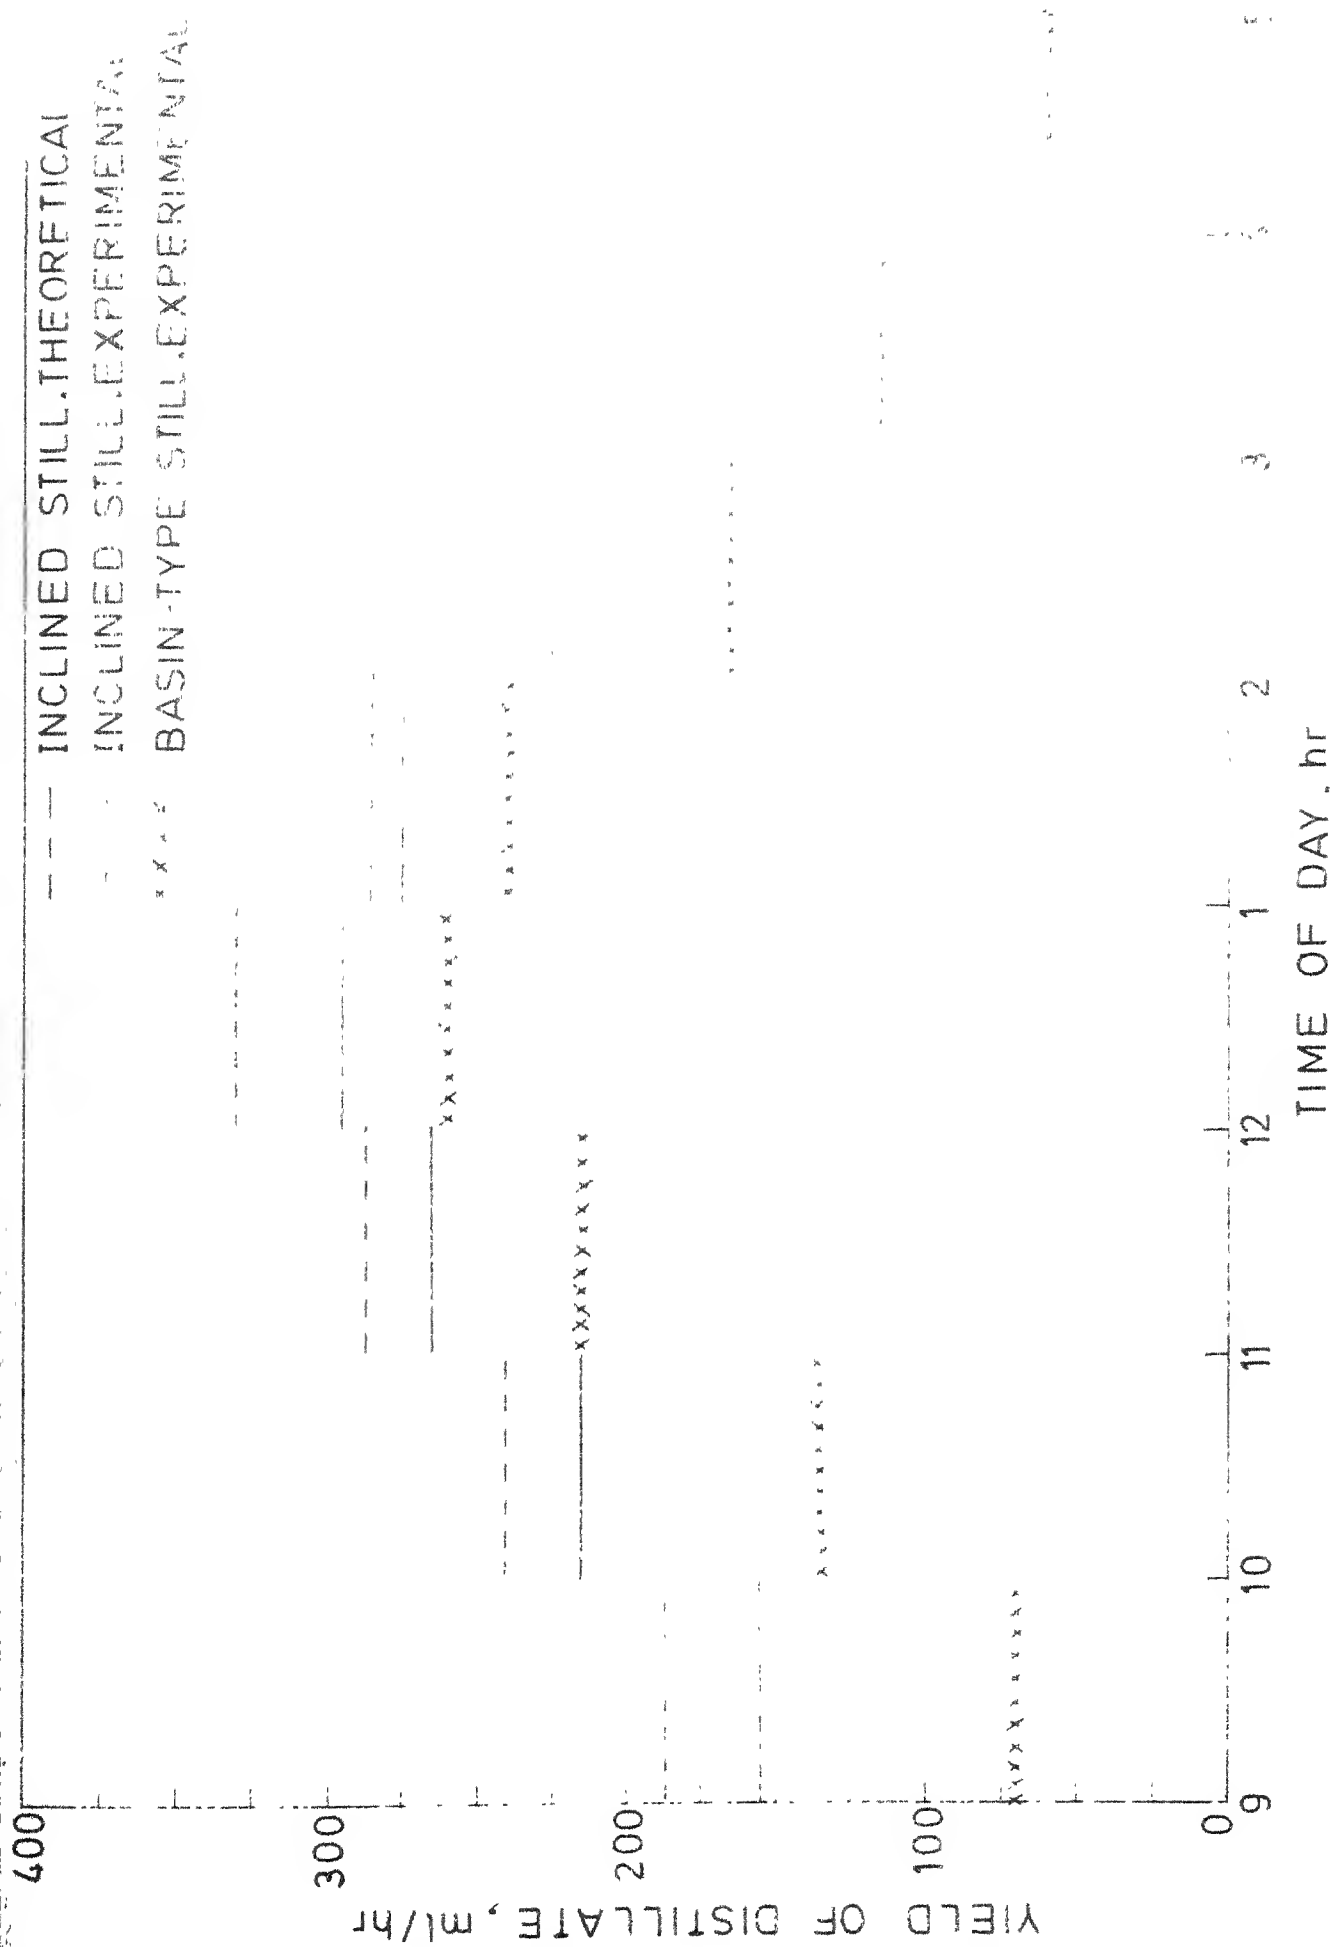


FIG.4.4 VARIATION OF HOURLY YIELD OF DISTILLATE WITH TIME OF DAY FOR THE SECOND MODE OF DISTILLATION



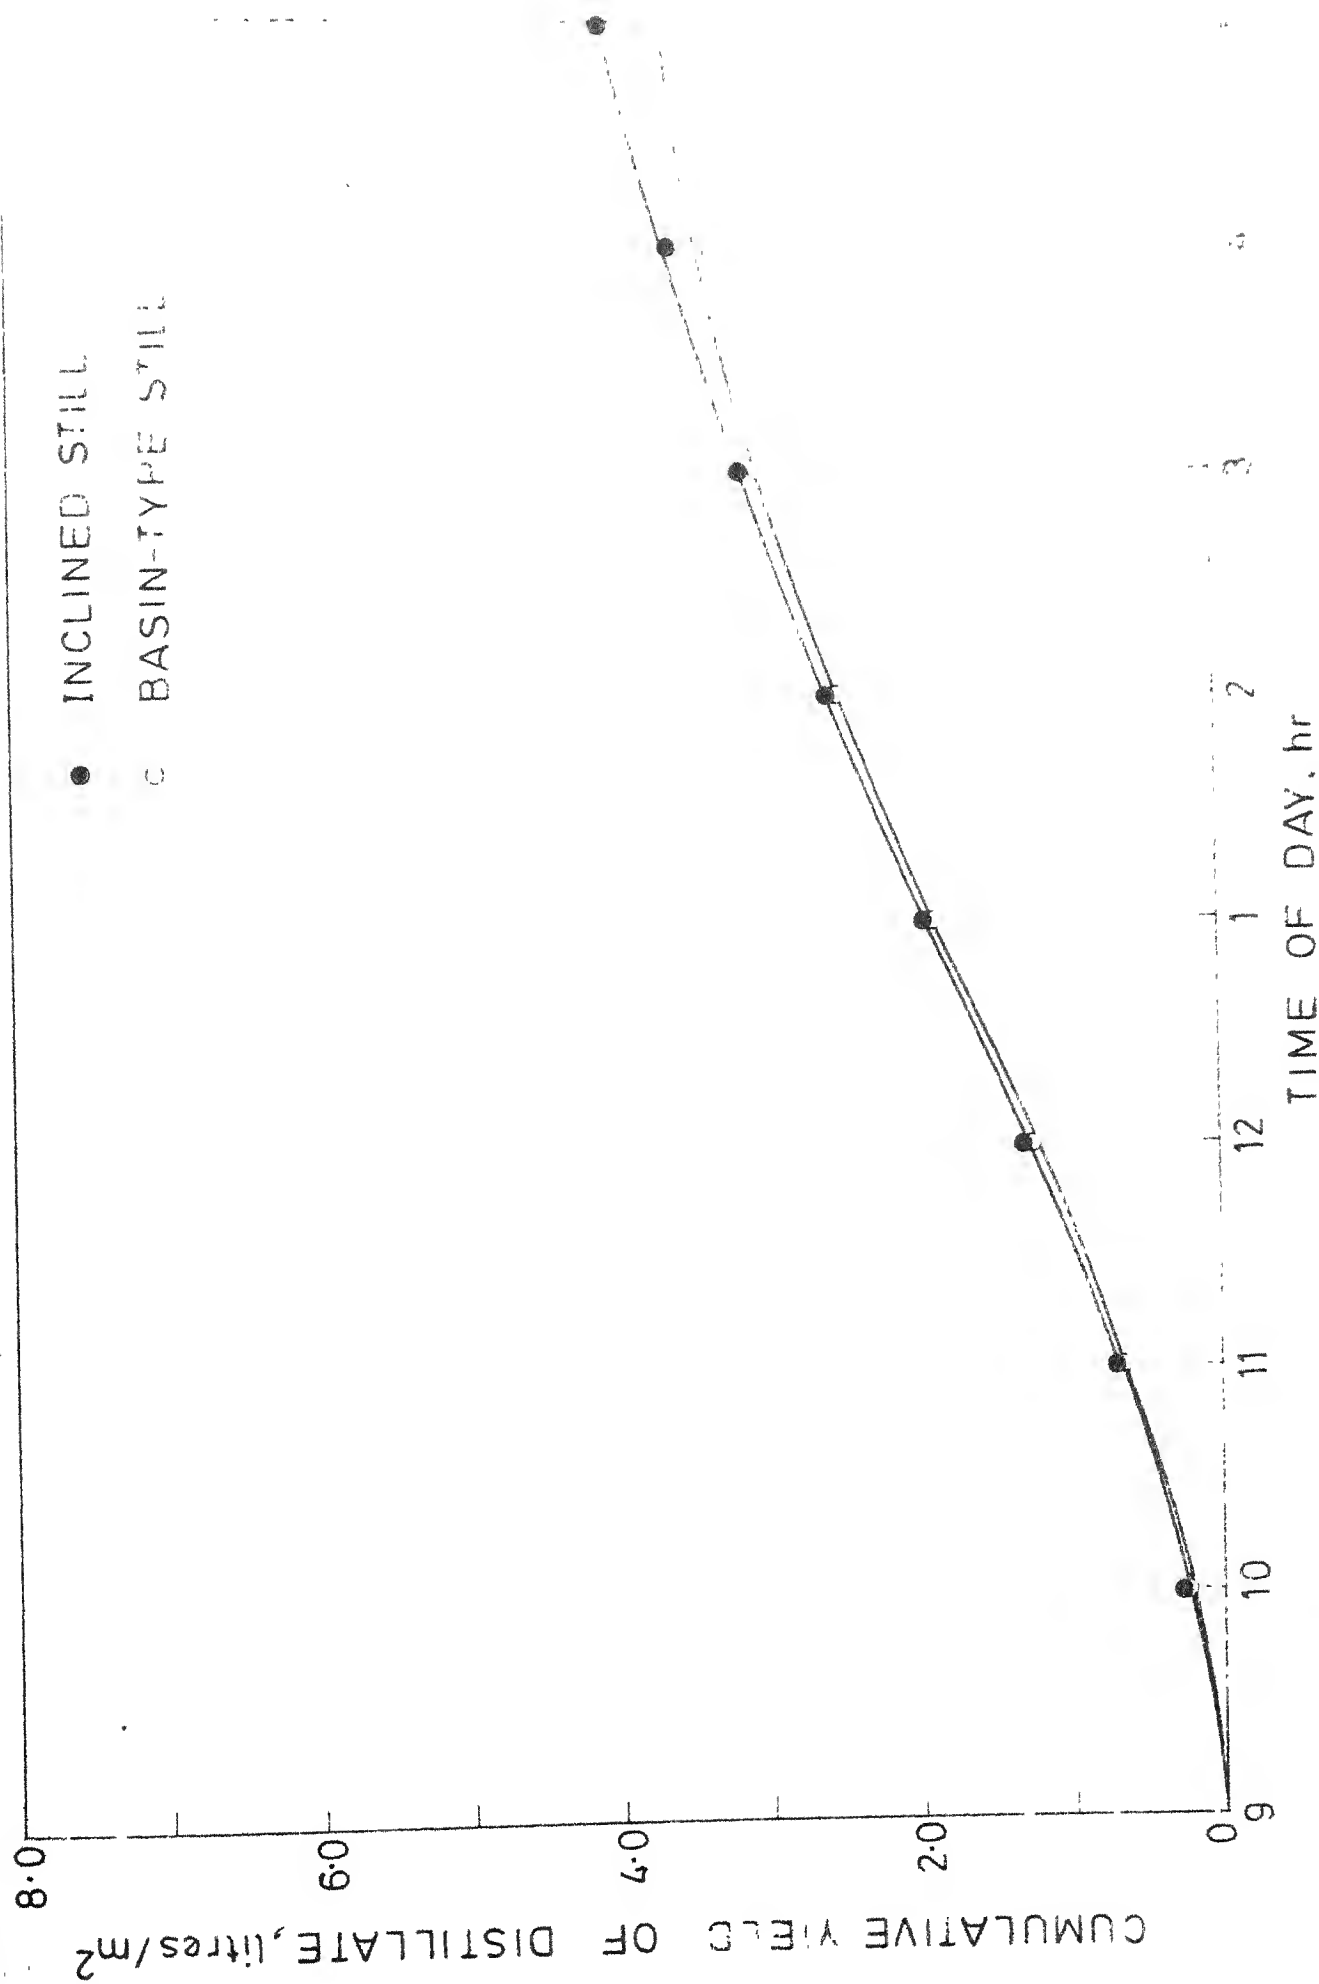


FIG.4.5 VARIATION OF CUMULATIVE YIELD OF DISTILLATE OVER THE DAY FOR THE FIRST MODE OF TEST (MAY 26, 1981)



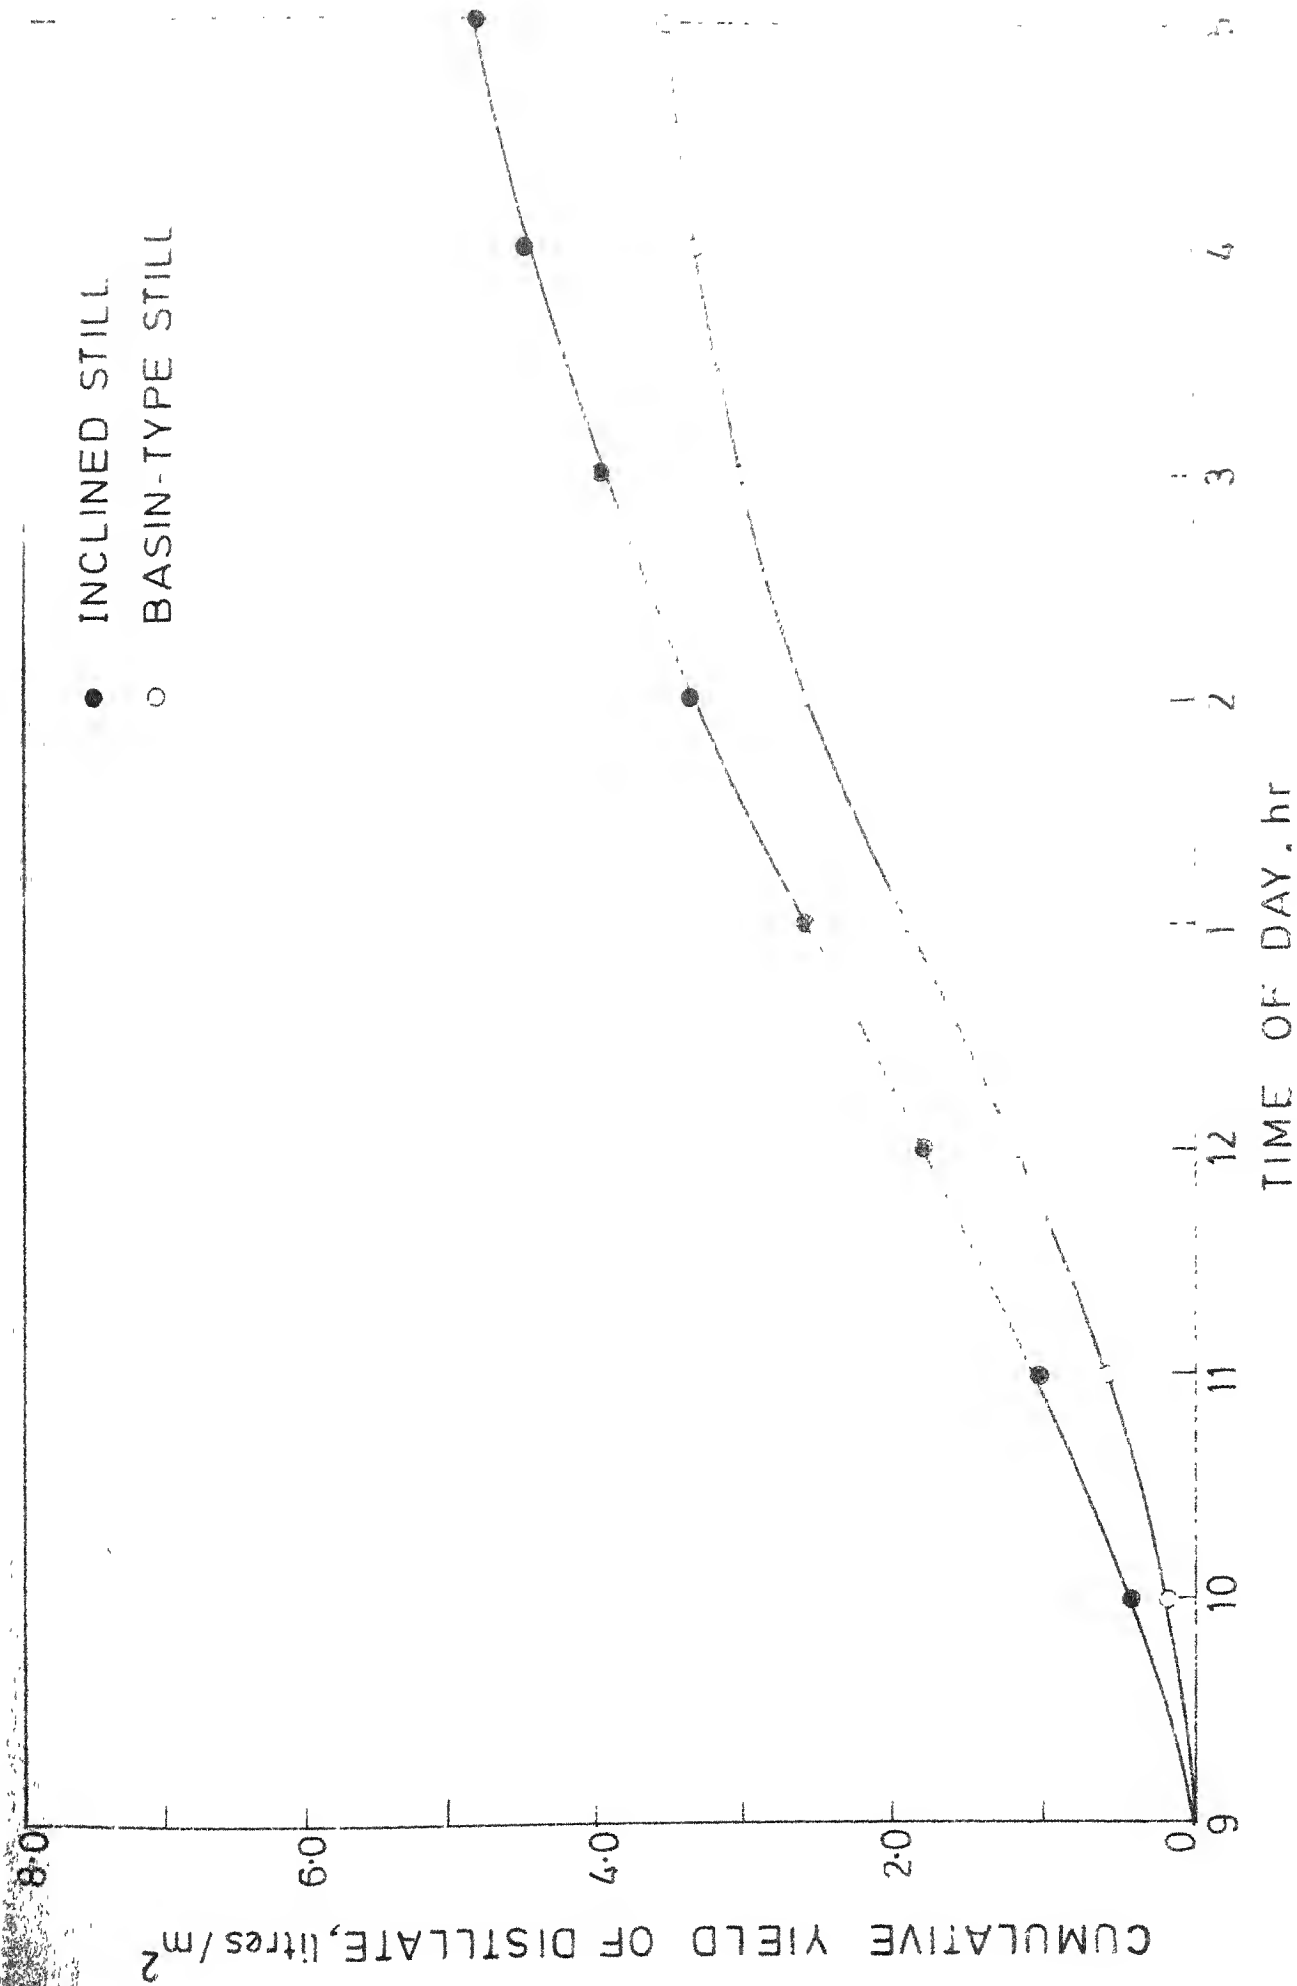


FIG. 4.6 VARIATION OF CUMULATIVE YIELD OF DISTILLATE OVER THE DAY FOR THE SECOND MODE OF TEST (MAY 27, 1981)

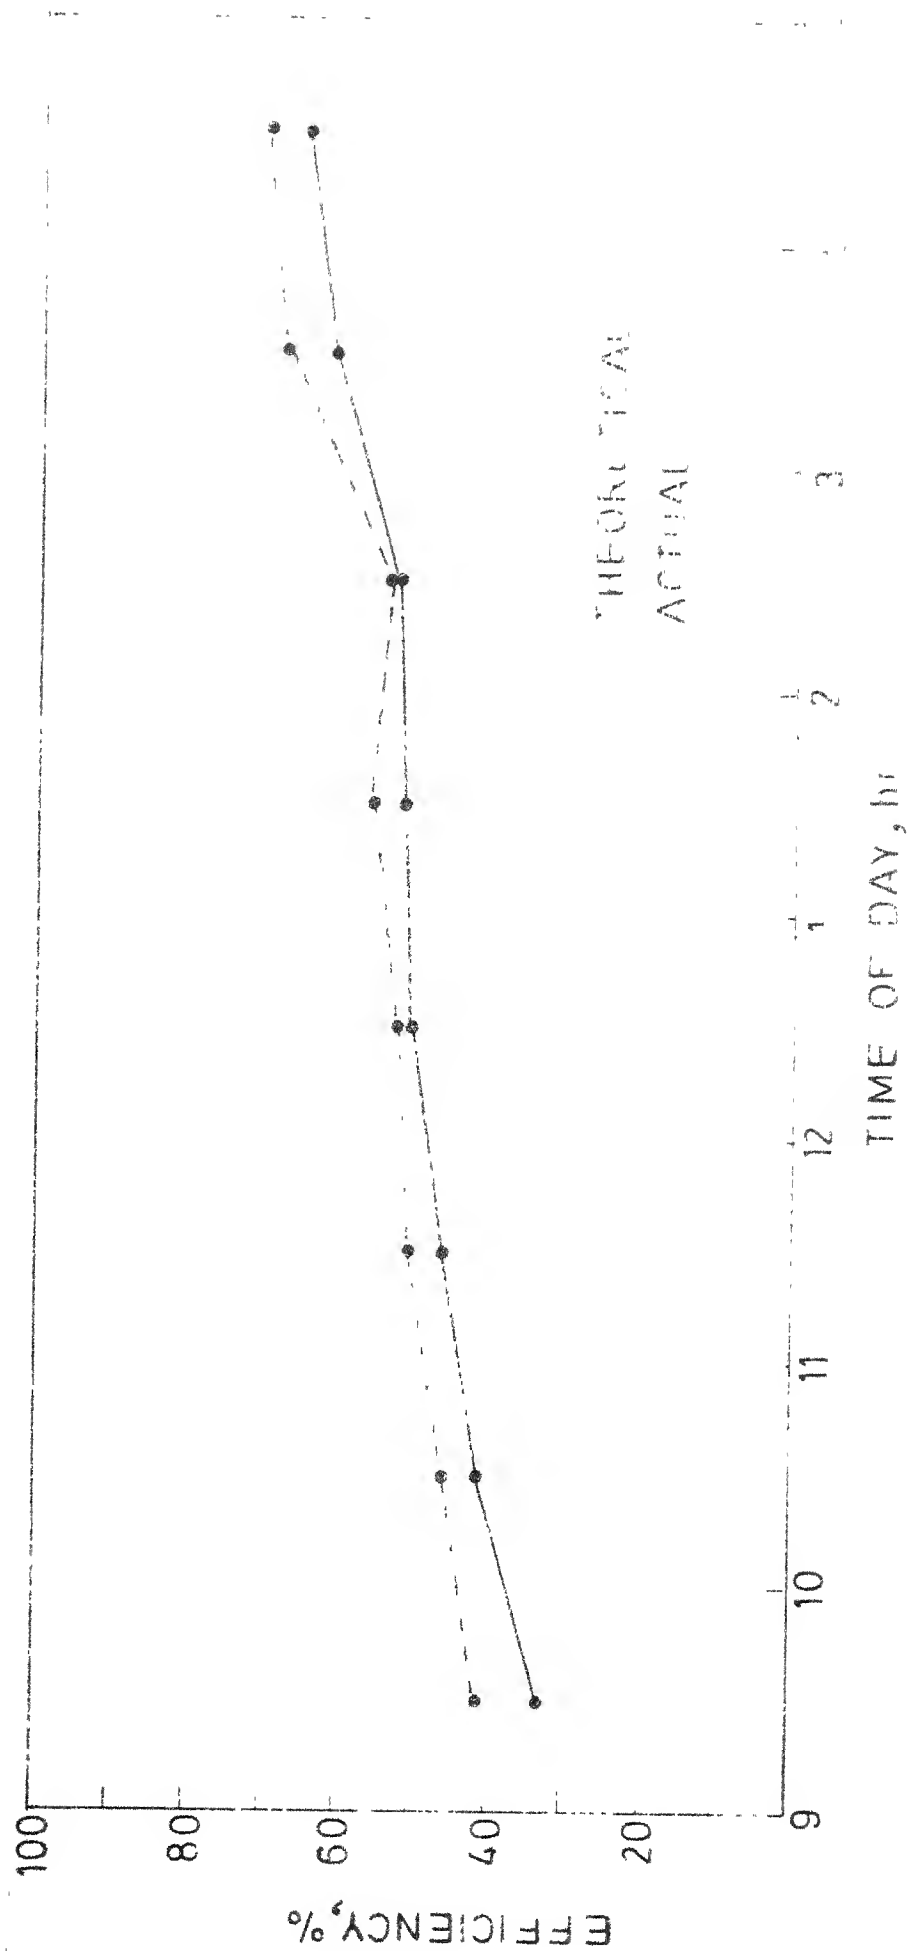


FIG.4.7 COMPARISON OF THE THEORETICAL AND ACTUAL EFFICIENCY OF CONVERSION FOR THE FIRST MODEL OF THE THERMOPHILIC INCLINED STILL (MAY 26, 1981)

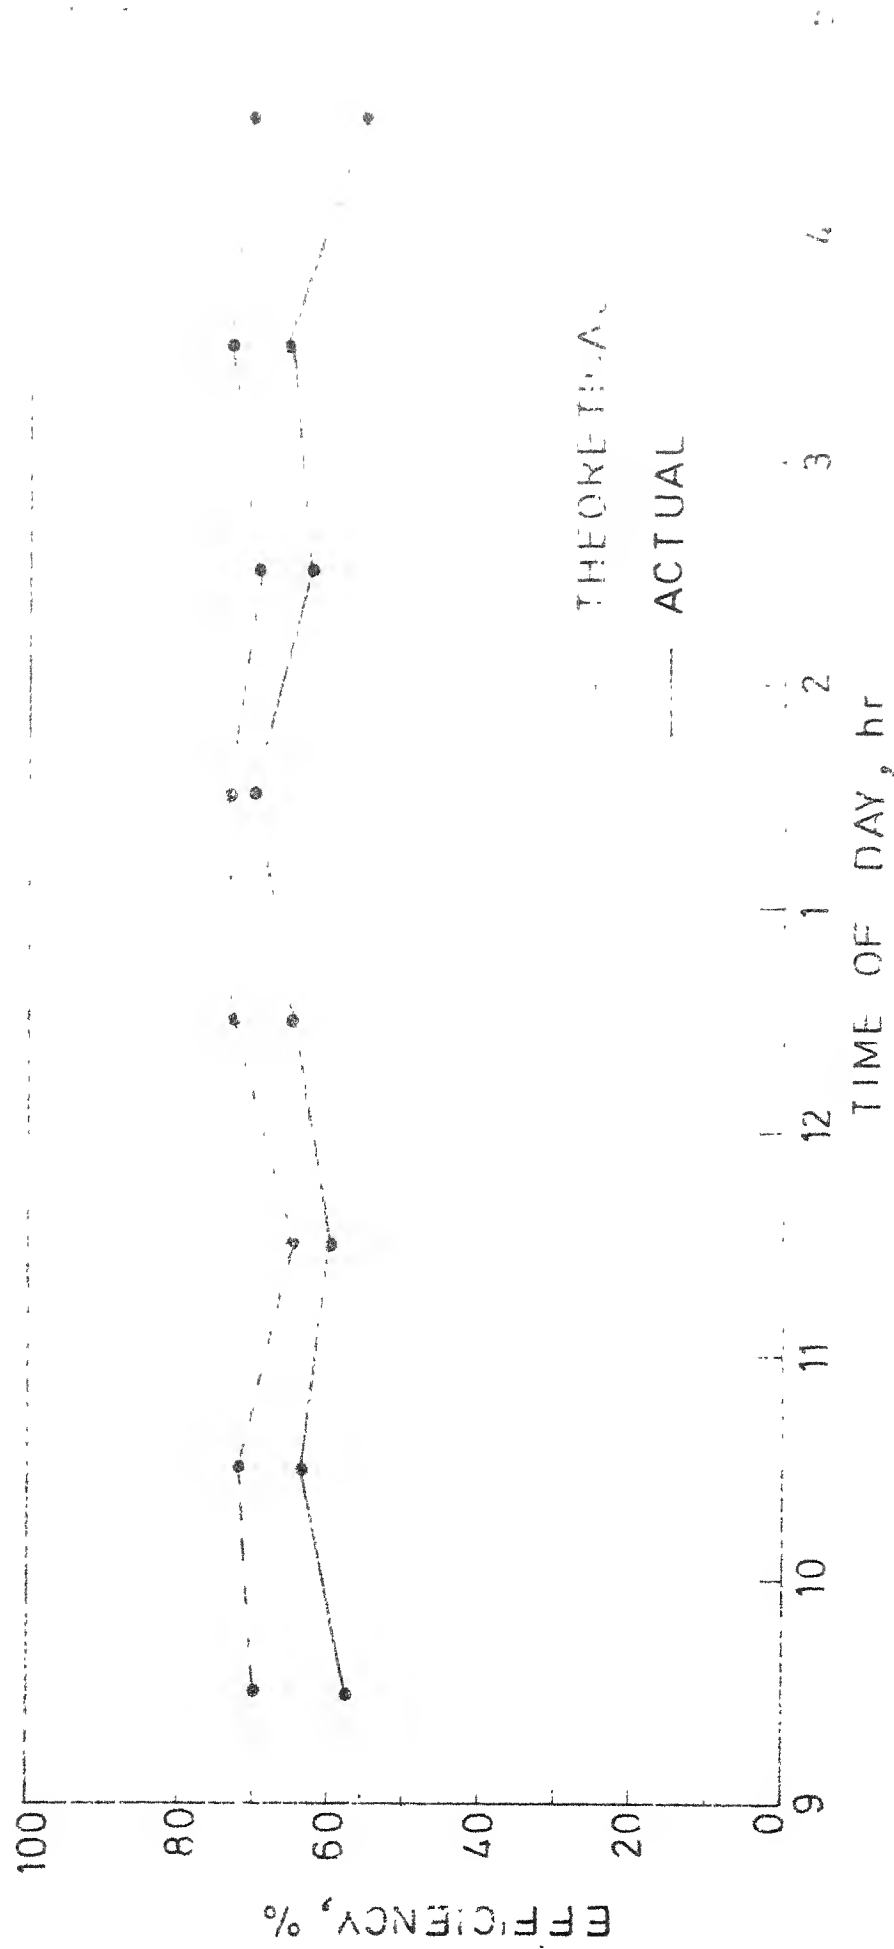


FIG.4.8 COMPARISON OF THE THEORETICAL AND ACTUAL EFFICIENCIES OF CONVERSION FOR THE SECOND MODE OF TEST FOR THE INCLINED STILL (MAY 27, 1981)

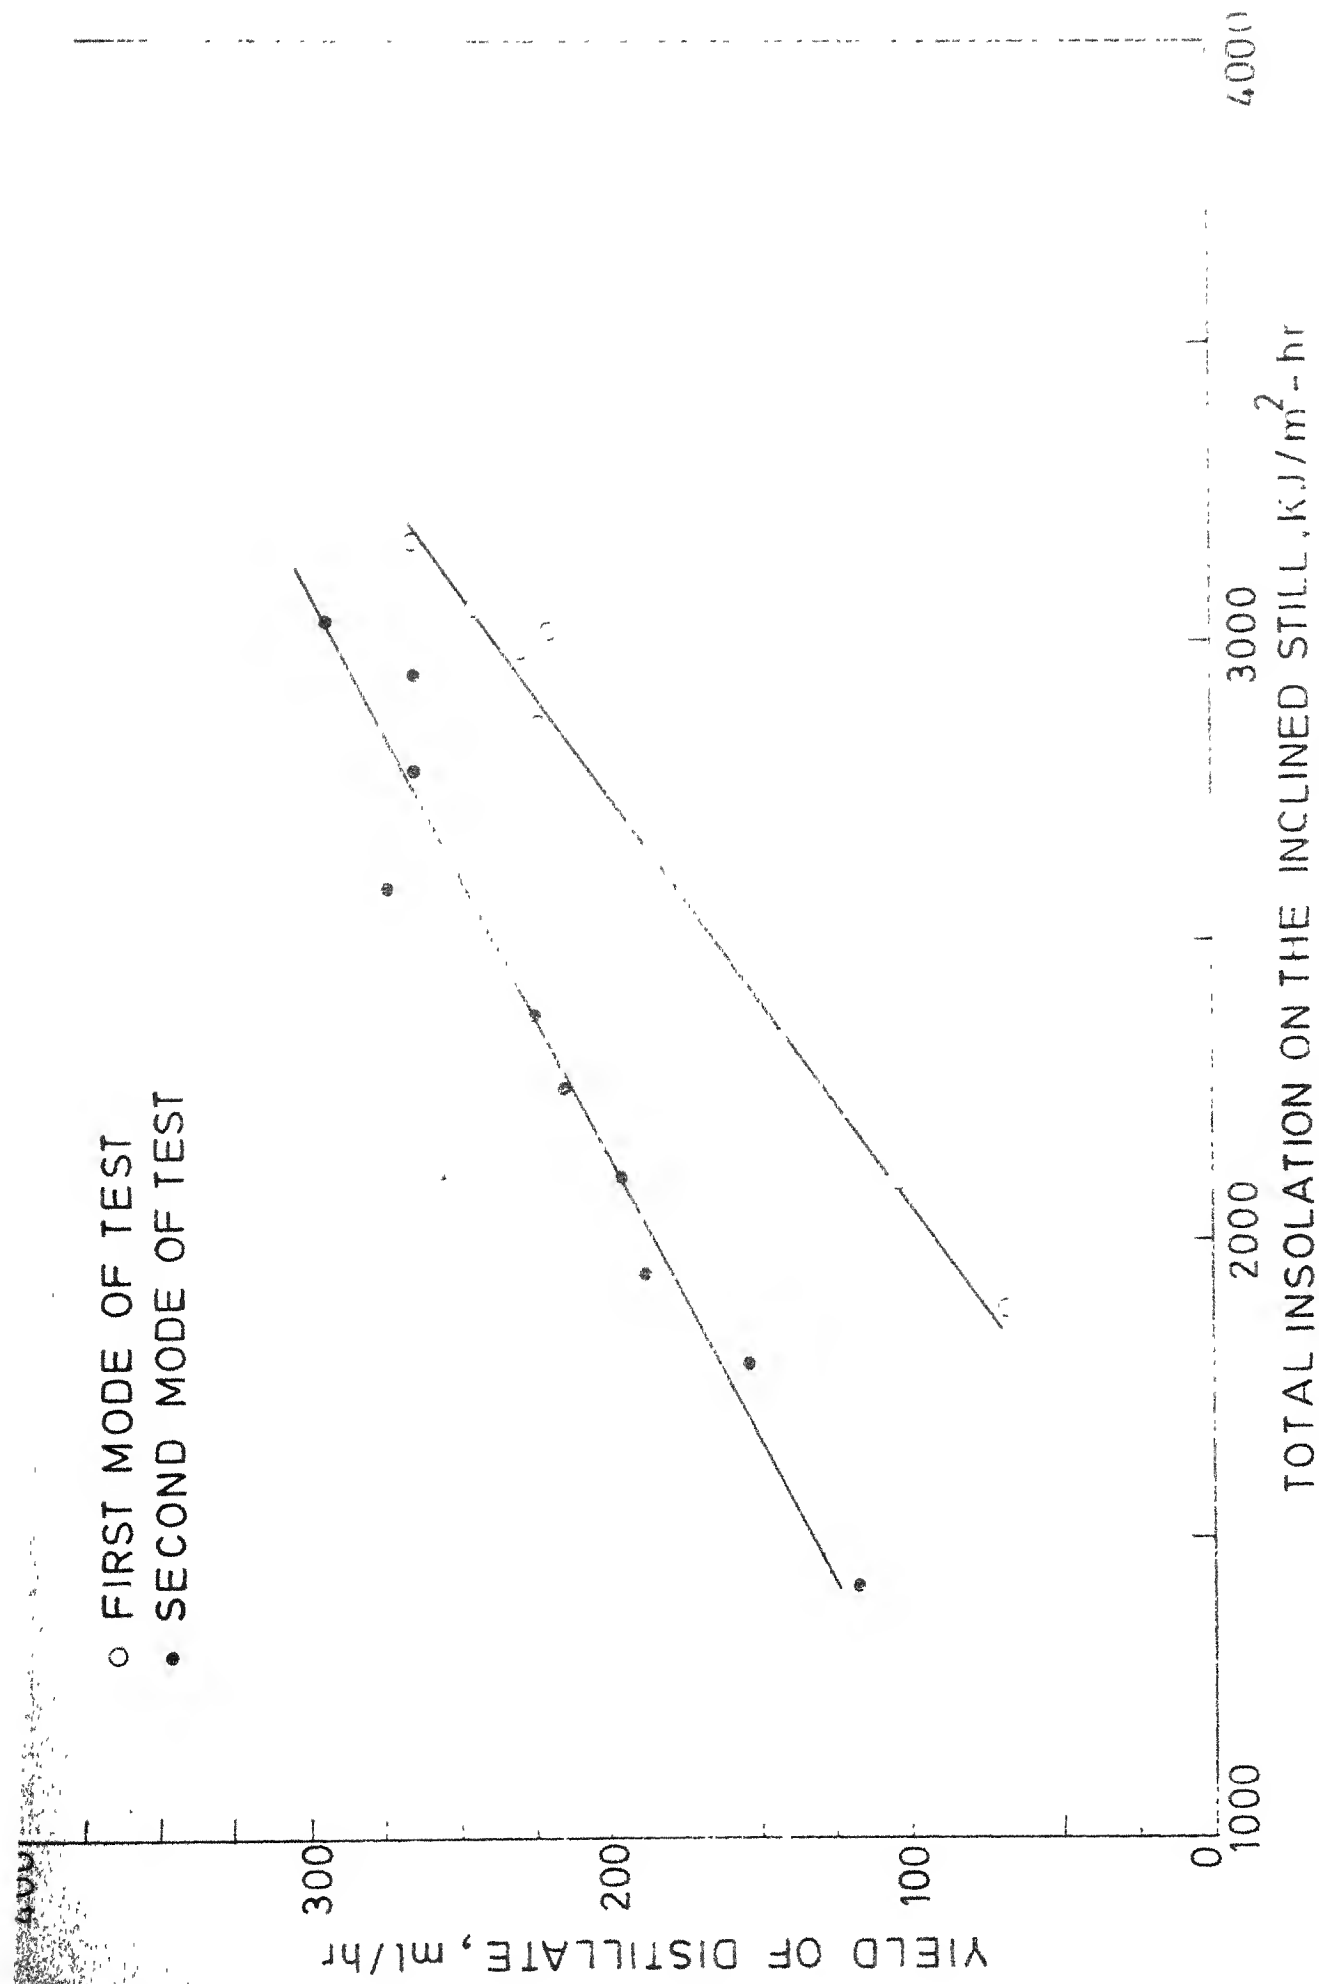


FIG.4.9 VARIATION OF YIELD OF DISTILLATE OVER TOTAL INSOLATION FOR THE INCLINED STILL

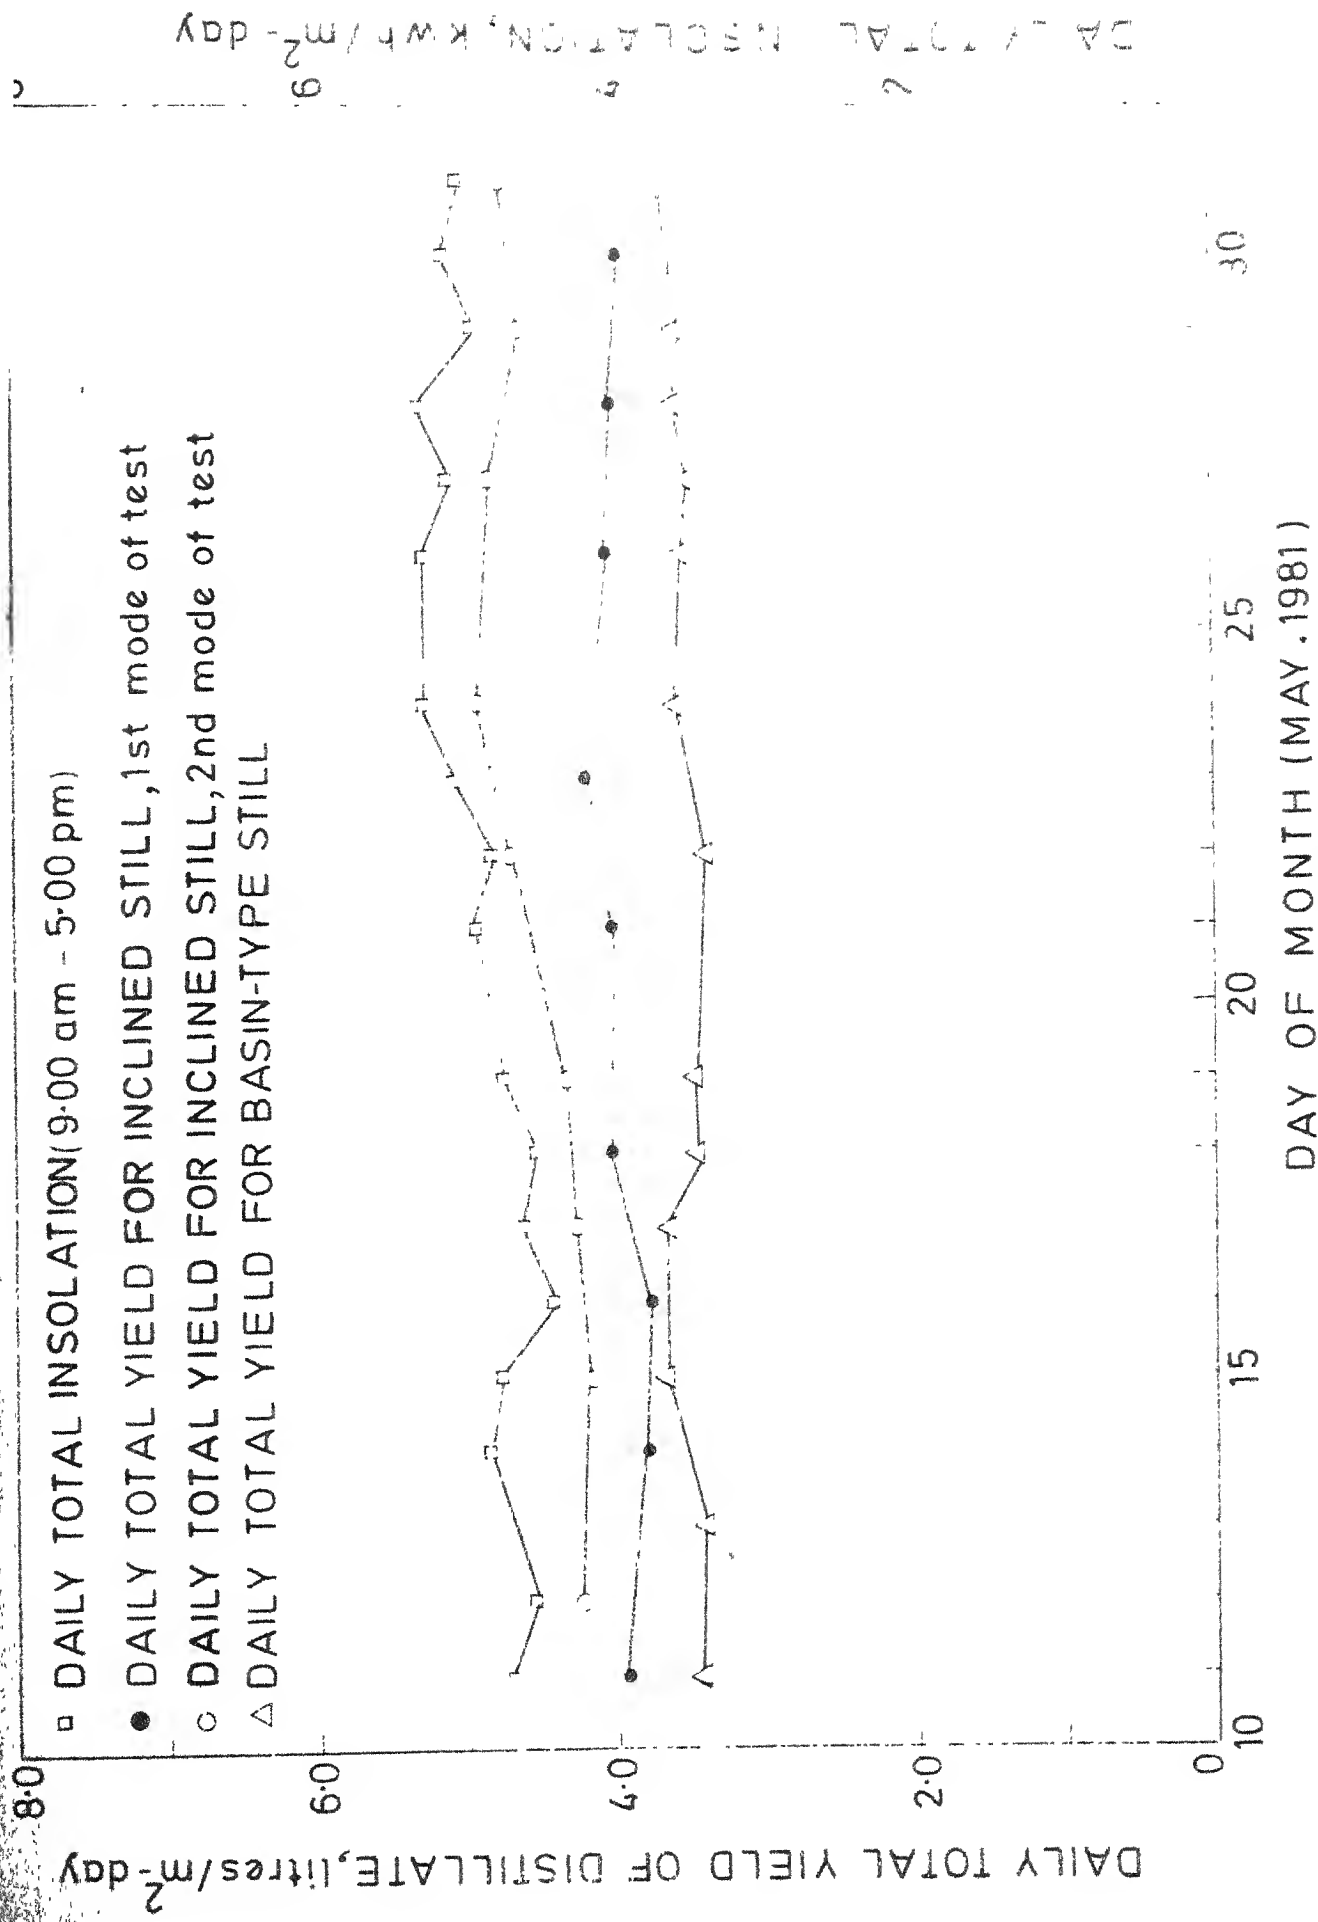


FIG-4.10 COMPARISON OF DAILY TOTAL YIELD OF DISTILLATE FOR THE MONTH OF MAY, 1981

that the efficiency in the second mode of test varies between 55 per cent - 70 per cent against 35 per cent - 65 per cent in case of the first mode.

A comparison of the yield of distillate for the two modes of tests against various values of total insolation on an inclined still is shown in Fig. 4.9. Such a graph is useful in the prediction of distillate yield on an hourly, daily or monthly basis, for various values of the intensity of radiation. However, extensive data are required for accurate prediction of such results.

Finally, the experimental results obtained for the daily total insolation and yield of distillate for the two types of stills during the month of May, 1981 are given in Table 4.3 and plotted in Fig. 4.10.

4.3 CONCLUSIONS

The following conclusions may be drawn on the basis of the study carried out on both the inclined and basin-type solar stills :

- (1) The inclined solar still combines the process of desalination and hot-water production. The heat which is normally dissipated to the ambient in a conventional solar still is utilized here effectively to obtain hot-water on a continuous basis at temperatures varying between 40 °C to 50 °C, throughout the day.

- (2) The process of cooling the bottom glass cover by the flowing saline water results in high yield of distillate and consequently, high conversion efficiency. Efficiencies more than 70 per cent have been attained for the second mode of test during the month of May.
- (3) The experimental results obtained for the inclined solar still match well in most cases with those obtained from theoretical analysis. The theoretical model may be further improved by taking into account the transient effects occurring inside the still.
- (4) The inclined solar still may be used for either mode of operation, depending upon the need of the user. The first mode of operation, which necessitates the use of an extra glass cover is justified in view of the hot-water production, since it results in only a marginal increase in the capital cost of the still.
- (5) The major accessory of the inclined solar still is the saline-water storage tank, which slightly increases the capital cost. However, in actual practice, large basins may be constructed along sea-coasts which will be filled up during high tides by sea water. The saline water will then be fed through pipes continuously into the inclined stills installed over a vast area. Such a scheme, if implemented, may result in the production of large quantities of fresh water economically in future.

REFERENCES

1. MARIA TELKES, Solar Stills, Proceedings of the World Symposium on Applied Solar Energy, Phoenix, Arizona, 1955, pp. 73-79.
2. W. SZULMAYER, Solar Stills With Low Thermal Inertia, Solar Energy, Vol. 14, No. 4, March 1973, pp.415-421.
3. V.R. MUTHUVEERAPPAN and G. KAMARAJ, Mini Solar Still for Rural Applications, Proceedings of the International Solar Energy Society Congress, New Delhi, India, 1978, pp. 2036-2040.
4. PIO C. LOBO and Rde SEVERINO ARAÚJO, A Simple Multi-effect Basin-type Solar Still, Proceedings of the International Solar Energy Society Congress, New Delhi, India, 1978, pp. 2026-2030.
5. R.A. AKHTAMOV et al., Study of Regenerative Inclined-Stepped Solar Still, Applied Solar Energy (Gelioteckhnika), Vol. 14, No. 4, 1978, pp. 41-44.
6. R.V. DUNKLE, Solar Water Distillation : The Roof-type Still and a Multiple-effect Diffusion Still, Int. Dev. Heat Transfer, ASME, 1961, pp. 895-902.
7. K.G.T. HOLLANDS et al., Free Convection across Inclined Air Layers with one Surface V-corrugated, Journal of Heat Transfer, August 1978, pp. 410-415.
8. W.R. WILCOX, Simultaneous Heat and Mass Transfer in Free Convection, Chemical Engineering Science, Vol. 13, 1961, pp. 113-119.

9. R.E. TREYBAL, Mass-Transfer Operations, 2nd Edition, McGraw-Hill, 1968, pp. 55-59.
10. J.R. WELTY, C.E. WICKS and R.E. WILSON, Fundamentals of Momentum, Heat and Mass Transfer, Wiley International Edition, 1969, p. 556.
11. R.B. BIRD, W.E. STEWARD and E.N. LIGHTFOOT, Transport Phenomena, John-Wiley and Sons, Inc., 1960, pp. 636-640.
12. MAX JACOB and GEORGE A. HAWKINS, Elements of Heat Transfer, 3rd Edition, John-Wiley and Sons, Inc., 1957, p.283.
13. E.R.G. ECKERT and R.M. DRAKE, Jr., Heat and Mass Transfer, 2nd Edition, Tata McGraw-Hill, 1979, pp. 500-504.
14. ROBERT H. PERRY and CECIL H. CHILTON, (Ed), Chemical Engineers' Handbook, 5th Edition, McGraw-Hill, 1973, pp. 3-230-3-233, p. 3-206.
15. A.A.M. SAYIGH (Ed), Solar Energy Engineering, Academic Press, 1977, p. 452.
16. FRANK KREITH and JAN F. KREIDER, Principles of Solar Engineering, McGraw-Hill, 1978, p. 547.

APPENDIX - 1EVALUATION OF THE BUOYANCY FACTORS FOR HEAT AND MASS
TRANSFERS IN NATURAL CONVECTION

Let V be the volume of the enclosure occupied by the mixture
in the inclined still.

and,

m the total mass of the mixture

m_A, m_B - masses of water-vapour and air in the mixture, respectively

M_A, M_B - molecular weights of water-vapour and air, respectively

p - total pressure of the mixture

p_A, p_B - partial pressures of water-vapour and air, respectively

T - mean temperature of the mixture

ρ, ρ_A, ρ_B - densities of mixture, water-vapour and air,
respectively

v, v_A, v_B - specific volumes of mixture, water-vapour, and air,
respectively

The coefficient of volume expansion for the mixture is given by

$$\beta_t = \frac{1}{v} \left(\frac{\partial v}{\partial T} \right)_p$$

Linearizing the above expression,

$$\beta_t \approx \frac{1}{v_2} \left(\frac{v_1 - v_2}{T_1 - T_2} \right),$$

where, the subscripts 1 and 2 refer to the lower and upper

surfaces of the enclosure, respectively.

or,

$$\begin{aligned}
 \beta_t(T_1 - T_2) &= \frac{v_1 - v_2}{v_2} \\
 &= \frac{\frac{1}{\rho_1} - \frac{1}{\rho_2}}{\frac{1}{\rho_2}} \\
 &= \frac{\rho_2}{\rho_1} - 1 \quad (i)
 \end{aligned}$$

Applying the ideal gas law to water-vapour and air, we obtain,

$$p_A V = \frac{m_A}{M_A} R_u T \quad (ii)$$

$$p_B V = \frac{m_B}{M_B} R_u T \quad (iii)$$

where R_u = Universal Gas Constant.

$$\text{From (ii), } \frac{m_A}{V} = \frac{p_A M_A}{R_u T}$$

$$\text{From (iii), } \frac{m_B}{V} = \frac{p_B M_B}{R_u T}$$

$$\text{Adding, } \frac{m_A + m_B}{V} = \frac{1}{R_u T} [p_A M_A + p_B M_B]$$

$$\text{i.e. } \frac{m}{V} = \frac{1}{R_u T} [p_A M_A + p_B M_B]$$

$$\text{or, } \rho = \frac{1}{R_u T} [p_A M_A + p_B M_B]$$

Hence, Eqn.(i) can be written as

$$\beta_t(T_1-T_2) = \frac{T_1}{T_2} \left[\frac{p_{A_2} M_A + p_{B_2} M_B}{p_{A_1} M_A + p_{B_1} M_B} \right] - 1 \quad (\text{iv})$$

From Dalton's Law of partial pressures,

$$p_A + p_B = p$$

Eqn.(iv) can be expressed as

$$\begin{aligned} \beta_t(T_1-T_2) &= \frac{T_1}{T_2} \left[\frac{p_{A_2} M_A + (p-p_{A_2}) M_B}{p_{A_1} M_A + (p-p_{A_1}) M_B} \right] - 1 \\ &= \frac{T_1}{T_2} \left[\frac{p_{A_2} M_A + (p-p_{A_2}) M_B + p_{A_1} M_A - p_{A_1} M_A - p_{A_1} M_B + p_{A_1} M_B}{p_{A_1} M_A + (p-p_{A_1}) M_B} \right] - 1 \end{aligned}$$

After rearranging terms and simplifying,

$$\begin{aligned} \beta_t(T_1-T_2) &= \frac{T_1}{T_2} \left[1 + \frac{(p_{A_1} - p_{A_2}) (M_B - M_A)}{(M_B p - p_{A_1}) (M_B - M_A)} \right] - 1 \\ &= \frac{T_1}{T_2} \left[1 + \frac{p_{A_1} - p_{A_2}}{\frac{M_B p}{M_B - M_A} - p_{A_1}} \right] - 1 \\ &= \frac{T_1 - T_2}{T_2} + \left[\frac{p_{A_1} - p_{A_2}}{\frac{M_B p}{M_B - M_A} - p_{A_1}} \right] \frac{T_1}{T_2} \quad (\text{v}) \end{aligned}$$

The coefficient of densification, β_m is defined as follows:

$$\beta_m = -\frac{1}{\rho} \left(\frac{\partial \rho}{\partial c} \right)_T \quad (\text{vi})$$

where c denotes the mixture concentration. The negative sign indicates that with the increase in the concentration of water-vapour in air, the mixture density, decreases, owing to the fact that moist air is lighter than dry air.

Linearizing the above expression,

$$\beta_m = -\frac{1}{\rho_2} \left(\frac{\rho_1 - \rho_2}{c_1 - c_2} \right)$$

$$\text{or,} \quad \beta_m (c_1 - c_2) = 1 - \frac{\rho_1}{\rho_2} \quad (\text{vii})$$

Applying ideal gas law to both water-vapour and air and proceeding in a similar way as before, we obtain, finally

$$\beta_m (c_1 - c_2) = \frac{T_1 - T_2}{T_1} + \left[\frac{\frac{p_{A1} - p_{A2}}{M_B p}}{\frac{M_B - M_A}{M_B} - \frac{p_{A2}}{p_{A1}}} \right] \frac{T_2}{T_1} \quad (\text{viii})$$

It has been found that for small differences in temperatures of the two surfaces, buoyancy factors for the heat and mass transfers denoted by the left-hand sides of expressions (v) and (viii) give nearly the same value.

APPENDIX - 2

COMPUTER PROGRAM

 THIS PROGRAMME COMPUTES THE MASS TRANSFER RATE AND
 THE HEAT FLUXES DUE TO CONVECTION, RADIATION AND
 EVAPORATION FOR THE INCLINED, SOLAR STILL

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632
 633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652
 653
 654
 655
 656
 657
 658
 659
 660
 661
 662
 663
 664
 665
 666
 667
 668
 669
 670
 671
 672
 673
 674
 675
 676
 677
 678
 679
 680
 681
 682
 683
 684
 685
 686
 687
 688
 689
 690
 691
 692
 693
 694
 695
 696
 697
 698
 699
 700
 701
 702
 703
 704
 705
 706
 707
 708
 709
 710
 711
 712
 713
 714
 715
 716
 717
 718
 719
 720
 721
 722
 723
 724
 725
 726
 727
 728
 729
 730
 731
 732
 733
 734
 735
 736
 737
 738
 739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751
 752
 753
 754
 755
 756
 757
 758
 759
 760
 761
 762
 763
 764
 765
 766
 767
 768
 769
 770
 771
 772
 773
 774
 775
 776
 777
 778
 779
 780
 781
 782
 783
 784
 785
 786
 787
 788
 789
 790
 791
 792
 793
 794
 795
 796
 797
 798
 799
 800
 801
 802
 803
 804
 805
 806
 807
 808
 809
 810
 811
 812
 813
 814
 815
 816
 817
 818
 819
 820
 821
 822
 823
 824
 825
 826
 827
 828
 829
 830
 831
 832
 833
 834
 835
 836
 837
 838
 839
 840
 841
 842
 843
 844
 845
 846
 847
 848
 849
 850
 851
 852
 853
 854
 855
 856
 857
 858
 859
 860
 861
 862
 863
 864
 865
 866
 867
 868
 869
 870
 871
 872
 873
 874
 875
 876
 877
 878
 879
 880
 881
 882
 883
 884
 885
 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912
 913
 914
 915
 916
 917
 918
 919
 920
 921
 922
 923
 924
 925
 926
 927
 928
 929
 930
 931
 932
 933
 934
 935
 936
 937
 938
 939
 940
 941
 942
 943
 944
 945
 946
 947
 948
 949
 950
 951
 952
 953
 954
 955
 956
 957
 958
 959
 960
 961
 962
 963
 964
 965
 966
 967
 968
 969
 970
 971
 972
 973
 974
 975
 976
 977
 978
 979
 980
 981
 982
 983
 984
 985
 986
 987
 988
 989
 990
 991
 992
 993
 994
 995
 996
 997
 998
 999
 1000
 1001
 1002
 1003
 1004
 1005
 1006
 1007
 1008
 1009
 1010
 1011
 1012
 1013
 1014
 1015
 1016
 1017
 1018
 1019
 1020
 1021
 1022
 1023
 1024
 1025
 1026
 1027
 1028
 1029
 1030
 1031
 1032
 1033
 1034
 1035
 1036
 1037
 1038
 1039
 1040
 1041
 1042
 1043
 1044
 1045
 1046
 1047
 1048
 1049
 1050
 1051
 1052
 1053
 1054
 1055
 1056
 1057
 1058
 1059
 1060
 1061
 1062
 1063
 1064
 1065
 1066
 1067
 1068
 1069
 1070
 1071
 1072
 1073
 1074
 1075
 1076
 1077
 1078
 1079
 1080
 1081
 1082
 1083
 1084
 1085
 1086
 1087
 1088
 1089
 1090
 1091
 1092
 1093
 1094
 1095
 1096
 1097
 1098
 1099
 1100
 1101
 1102
 1103
 1104
 1105
 1106
 1107
 1108
 1109
 1110
 1111
 1112
 1113
 1114
 1115
 1116
 1117
 1118
 1119
 1120
 1121
 1122
 1123
 1124
 1125
 1126
 1127
 1128
 1129
 1130
 1131
 1132
 1133
 1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187
 1188
 1189
 1190
 1191
 1192
 1193
 1194
 1195
 1196
 1197
 1198
 1199
 1200
 1201
 1202
 1203
 1204
 1205
 1206
 1207
 1208
 1209
 1210
 1211
 1212
 1213
 1214
 1215
 1216
 1217
 1218
 1219
 1220
 1221
 1222
 1223
 1224
 1225
 1226
 1227
 1228
 1229
 1230
 1231
 1232
 1233
 1234
 1235
 1236
 1237
 1238
 1239
 1240
 1241
 1242
 1243
 1244
 1245
 1246
 1247
 1248
 1249
 1250
 1251
 1252
 1253
 1254
 1255
 1256
 1257
 1258
 1259
 1260
 1261
 1262
 1263
 1264
 1265
 1266
 1267
 1268
 1269
 1270
 1271
 1272
 1273
 1274
 1275
 1276
 1277
 1278
 1279
 1280
 1281
 1282
 1283
 1284
 1285
 1286
 1287
 1288
 1289
 1290
 1291
 1292
 1293
 1294
 1295
 1296
 1297
 1298
 1299
 1300
 1301
 1302
 1303
 1304
 1305
 1306
 1307
 1308
 1309
 1310
 1311
 1312
 1313
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329
 1330
 1331
 1332
 1333
 1334
 1335
 1336
 1337
 1338
 1339
 1340
 1341
 1342
 1343
 1344
 1345
 1346
 1347
 1348
 1349
 1350
 1351
 1352
 1353
 1354
 1355
 1356
 1357
 1358
 1359
 1360
 1361
 1362
 1363
 1364
 1365
 1366
 1367
 1368
 1369
 1370
 1371
 1372
 1373
 1374
 1375
 1376
 1377
 1378
 1379
 1380
 1381
 1382
 1383
 1384
 1385
 1386
 1387
 1388
 1389
 1390
 1391
 1392
 1393
 1394
 1395
 1396
 1397
 1398
 1399
 1400
 1401
 1402
 1403
 1404
 1405
 1406
 1407
 1408
 1409
 1410
 1411
 1412
 1413
 1414
 1415
 1416
 1417
 1418
 1419
 1420
 1421
 1422
 1423
 1424
 1425
 1426
 1427
 1428
 1429
 1430
 1431
 1432
 1433
 1434
 1435
 1436
 1437
 1438
 1439
 1440
 1441
 1442
 1443
 1444
 1445
 1446
 1447
 1448
 1449
 1450
 1451
 1452
 1453
 1454
 1455
 1456
 1457
 1458
 1459
 1460
 1461
 1462
 1463
 1464
 1465
 1466
 1467
 1468
 1469
 1470
 1471
 1472
 1473

MA, MB REPRESENT THE MOLECULAR WEIGHTS OF WATER AND AIR ,
RESPECTIVELY , PT, THE TOTAL PRESSURE INSIDE THE STILL
EXPRESSED IN KILOGRAM FORCE PER SQUARE CENTIMETER.

$$\text{BUOYT} = \frac{(T(M)-T(N))/T(N) + ((P(M)-P(N))/((PT*MB/(MB-MA))-P(N))) * 1}{1 + (T(N)/T(M))}$$

$$\text{BUOYM} = \frac{(1(M)-T(N))/T(N) + ((P(M)-P(N))/((PT*MB/(MB-MA))-P(N))) * 1}{1 + (T(N)/T(M))}$$

BUOYT & BUOYM REPRESENT THE BUOYANCY FACTORS FOR HEAT & MASS
TRANSFERS , RESPECTIVELY.

$$L = 0.05$$

L REPRESENTS THE DISTANCE IN METRES , BETWEEN THE EVAPORATING
AND CONDENSING SURFACES , G , THE ACCELERATION DUE TO GRAVITY
IN METRES PER SECOND SQUARED

$$G = 9.81$$

$$\text{GR} = G * L * L * \text{AVPHO} * \text{AVRHO} * \text{BUOYT} / (\text{AVMU} * \text{AVMU})$$

$$\text{GRM} = G * L * L * \text{AVPHO} * \text{AVRHO} * \text{BUOYM} / (\text{AVMU} * \text{AVMU})$$

GR, GRM REPRESENTS THE GRASHOF NUMBERS FOR HEAT AND MASS
TRANSFERS , RESPECTIVELY

$$\text{PR} = 11300 * (1.0 + 0.204 * \text{SIND}(4.5 * (\text{IB} - 37.8)))$$

$$\text{PR} = \text{AVMU} * \text{CP} / \text{AVK}$$

PR REPRESENTS THE PRANDTL NUMBER

$$D = 1.17E-09 * ((T(M) + T(N)) / 2.0 + 273) ** 1.75$$

D REPRESENTS THE DIFFUSION COEFFICIENT , EXPRESSED IN SQUARE
METER PER SECOND

$$\text{SC} = (\text{AVMU} / \text{AVRHO}) / D$$

SC REPRESENT THE SCHMIDT NUMBER

$$\text{HC} = \text{AVK} / L * (2.44 + (2.23 - 0.123 * \text{IB} + 0.00034 * \text{IB} * \text{IB}) * ((\text{GR} * \text{PR} / \text{RAT} * 1 \text{ CUSD}(\text{FLOAT}(\text{IB}))) ** (1.0 / 3.0)) - 1.0)$$

HC REPRESENTS THE HEAT TRANSFER COEFFICIENT EXPRESSED IN WATTS
PER SQUARE METER PER DEGREE CENTIGRADE

$$\text{CON} = \text{HC} * (T(M) - T(N))$$


```

12700
12800
12900
13000
13100
13200
13300
13400
13500
13600
13700
13800
13900
14000
14100
14200
14300
14400
14500
14600
14700
14800
14900
15000
15100
15200
15300
15400
15500
15600
15700
15800
15900
16000
16100
16200
16300
16400
16500
16600
16700
16800
16900
17000
17100
17200
17300
17400
17500
17600
17700
17800
17900
18000
18100
18200
18300
18400
18500
18600
18700
18800
18900
19000

```

CON REPRESENTS THE HEAT FLUX DUE TO CONVECTION , EXPRESSED IN
WATTS PER SQUARE METER.

$$PAD = 5.103 * (((T(M)+273)/100)**4 - ((T(N)+273)/100)**4)$$

PAD REPRESENTS THE HEAT FLUX DUE TO RADIATION , EXPRESSED IN
WATTS PER SQUARE METER

$$HD = AVK/L*(2.44+(2.23-0.123*IB+0.00034*IB*IP)*((GPM*SC/PAT+1)*COSD(FLOAT(IB)))**((1.0/3.0))-1.0)$$

HD REPRESENTS THE MASS -TRANSFER COEFFICIENT , EXPRESSED IN
KILOGRAM PER SQUARE METER PER SECOND.

$$N1 = (5.689E08*HD/AVRH0)*(1./((T(M)+T(N))/2.0+273))*(P(M)-P(N))/1(2.0*PT-P(M)-P(N))$$

N1 REPRESENTS THE MASS TRANSFER RATE,EXPRESSED IN MILLILITRES
PER HOUR

$$EVAP = 0.0032283 * N1 * HFG(N)$$

EVAP REPRESENTS THE HEAT FLUX DUE TO EVAPORATION , EXPRESSED
IN WATTS PER SQUARE METER

PRINT50,IB,BUOYT,BUOYM,RAT,D,GR,GRM,PR,SC,HC,HD,N1,CON,PAD,EVA
CONTINUE
CONTINUE
FORMAT(/,132(1H=),/3X,'FW = ',F4,1,4X,'TG = ',F4,1,4X,'RHO = ',
1,F6,4,4X,'MU = ',F14,7,4X,'K = ',F7,5,4X,'PW = ',F7,5,4X,'PC = ',
2,'F7,5,4X,'HFG = ',F5,1//)
50 FORMAT(3X,I2,3X,F4,2,3X,F4,2,3X,F7,1,3X,E8,3,3X,E8,3,3X,E8,3,3X,
1F4,2,3X,F4,2,3X,F4,1,3X,F7,5,3X,F6,1,3X,F5,1,3X,F5,1,3X,F5,1,3X,
25 FORMAT(' B BUOYT BUOYM RAT D GR GRM PR
1 SC HC HD N1 CON RAD EVAP')

STOP
END

SUBROUTINE AVEG(M,N)
COMMON/AV/RHO(90),XMU(90),XK(90),P(90),HFG(90),T(90)
COMMON/BV/AVRHO,AVMU,AVK
AVRHO = (RHO(M) + RHO(N))/2.0
AVMU = (XMU(M) + XMU(N))/2.0
AVK = (XK(M) + XK(N))/2.0

C
TYPE 1
RETURN
1 FORMAT(' OUT')
END



A 70577

ME-1901-M-SIN-FAB

